

▪ 2064 x 1544

▪ 55 fps

Apex Series 



## AP-3200T-PMCL

3.2 megapixel CMOS prism area scan



- **High resolution prism-based 3CMOS camera**
- **Full spatial resolution and true RGB color values with no interpolation**
- **Individual analog gain and exposure control for R, G, and B channels**
- **Color and edge enhancement functions**
- **On-board RGB to HSI, XYZ, sRGB and Adobe RGB color space conversions**
- **Single and multi-ROI's**
- **RGB video output with 8, 10, or 12-bits per channel\***
- **Compact size and smart design**
- **Excellent shock and vibration resistance**
- **GenICam-compliant Camera Link interface with support for PoCL**
- **C-mount lens mount**

\* Some video processing functions not available with 12-bit output

# Specifications for AP-3200T-PMCL

# Apex Series

Specifications		AP-3200T-PMCL
Sensor	1/1.8" 3-CMOS global shutter (IMX265)	
Active pixels	2064 (h) x 1544 (v) x 3 (R,G,B)	
Frame rate, full frame	55.6 frames/sec. @ 8-bit	
Active area	7.12 mm (h) x 5.33 mm (v) - 8.89 mm diagonal	
Pixel size	3.45 μm x 3.45 μm	
Pixel clock (Camera Link)	37.125 / 74.25 / 84.85 MHz	
Read-out modes	Full ROI (single): 2064 (h) x 1544 (v) up to 55.6 fps H: 16 to 2064 pixels in 16 pixel steps V: 2 to 1544 lines in 2 line steps Binning: 1x2, 2x1, 2x2	
EMVA 1288 Parameters	12-bit output format	
Absolute sensitivity	3.77 p (λ = 525 nm)	
Maximum SNR	40.39 dB	
Traditional SNR*	>60 dB (0 dB gain, 10-bit)	
Video signal output	8/10/12-bits per channel† (24/30/36-bit RGB)	
Video modes	Normal, Single ROI, Multi ROI, Sequencer	
Gain	Manual control - master mode or individual R/G/B channels Auto gain control - off, continuous, one-push	
White balance	Off, 4 presets (3200K, 5000K, 6500K, 7500K), or one-push/continuous AWB using gain or exposure time (3000K to 9000K)	
Gamma/LUT	0.45 to 1.0 (9 steps) or 257-point programmable LUT	
Shading correction	Flat shading, color shading	
Trigger input	Camera Link, Opto In (2), Pulse Generators (4), Software, NAND Out (2), User Output (4)	
Exposure modes	Timed/EPS, Trigger Width, Auto	
Electronic shutter	(can be set independently for R/G/B channels) 16 μs to 8 sec. in 1 μs steps (8-bit) 16 μs to 8 sec. in 1 μs steps (10-bit)	
Auto Level Control (ALC)	Shutter range from 100 μs to 13.427 ms, gain range from 0 dB to +12 dB. Tracking speeds and max. values adjustable.	
Pre-processing functions	Color enhancer, edge enhancer, color space conversion (RGB to HSI, XYZ, sRGB, Adobe RGB), blemish compensation (200 px/channel)	
Operating temp. (ambient)	-5°C to +45°C (20 to 80% non-condensing)	
Storage temp. (ambient)	-25°C to +60°C (20 to 80% non condensing)	
Vibration	3G (20 Hz to 200 Hz, XYZ directions)	
Shock	50G	
Regulations	CE (EN61000-6-2, EN61000-6-3) FCC Part 15 Class B, RoHS/WEEE	
Power	12-pin PoCL	+12V to +24V DC ± 10%. TBD W typical @ +12 V +12V DC ± 10%. TBD W typical @ +12 V
Lens mount	C-mount	
Dimensions (H x W x L)	44 mm x 44 mm x 74 mm (excl. connectors)	
Weight	170 g	

Ordering Information	
AP-3200T-PMCL	3-CMOS prism color camera with Camera Link

\*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time.

Europe, Middle East & Africa  
Phone +45 4457 8888  
Fax +45 4491 8880

Asia Pacific  
Phone +81 45 440 0154  
Fax +81 45 440 0166

Americas  
Phone (Toll-Free) 1 800 445 5444  
Phone +1 408 383 0300

Visit our website on [www.jai.com](http://www.jai.com)

### Dimensions

Outside size tolerance ± 0.3 mm

### Connector pin-out

#### DC In / Trigger

HIROSE HR10A-10R-12PB(71)


Pin	Signal
1	Ground
2	DC in +12V to +24V
3	Opto In 2-
4	Opto In 2+
5	Opto In 1-
6	Opto In 1+
7	Opto Out 1-
8	Opto Out 1
9	TTL out 1
10	NC
11	DC in +12V to +24 V
12	Ground

#### Mini-CL Interface

Pin	Signal	Function	
1	26	Power	
2	15	X0-/X0+	CL Data
3	16	X1-/X1+	CL Data
4	17	X2-/X2+	CL Data
5	18	Xclk-/Xclk+	CL CLK
6	19	X3-/X3+	CL Data
7	20	SerTC+/SerTC-	Serial in
8	21	SerTFG+/SerTFG-	GND
9	22	CC1-/CC1+	Trigger*
10	23	CC2-/CC2+	Reserved
11	24	CC3-/CC3+	Not used
12	25	CC4-/CC4+	Not used
13	14	GND	

\*Via Camera Link or 12-pin connector

**Note:**  
Camera Link Base configuration shown. For other configurations, refer to Camera Link specifications or operation manual.

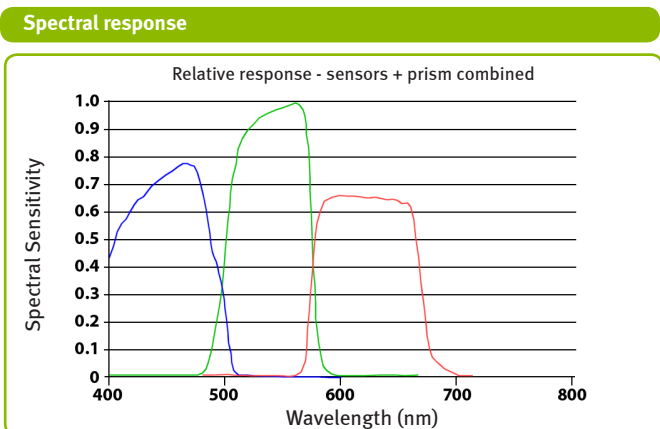

†12-bit output available in video processing bypass mode. See manual for details.

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI-A-S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notice.



See the possibilities