

❖ **GO-5000M-PMCL-UV**
5-megapixel CMOS global shutter




- *Large format 5 MP CMOS imager (global shutter) with extended UV sensitivity*
- *Up to 107 fps at full resolution*
- *5.0 μm square pixels*
- *Small size (29 x 29 x 41.5 mm, excluding lens mount)*
- *8/10/12-bit monochrome output*
- *60 dB linear dynamic range with built-in HDR modes up to 100 dB*
- *Analog and digital gain control for less quantized noise in low-light situations*
- *Exposure control from 10 μs (1/100,000) to 8 seconds in 1 μs steps*
- *2X and 4X binning for increased sensitivity*
- *Single and multi-ROI modes for flexible windowing and use of 2/3" or smaller optics*
- *Automatic Level Control (ALC) for dynamic lighting conditions*
- *Accepts power over Mini Camera Link connectors*
- *C-mount lens mount*

Specifications for GO-5000M-PMCL-UV

Go Series


Specifications	GO-5000M-PMCL-UV
Sensor	1" CMOS global shutter (Lince 5M) with no microlenses
Sensor protective covering	Quartz glass with double AR coating
Pixel clock	36/28.8/24 MHz
Frame rate, full frame	107 frames/sec. (8-bit, 8-tap, full CL)
Active area	12.8 mm (h) x 10.24 mm (v), 16.39 mm diagonal
Cell size	5.0 μm (h) x 5.0 μm (v)
Active pixels	2560 (h) x 2048 (v)
Read-out modes	Full ROI: 2560 (h) x 2048 (v) up to 107 fps Any start line, any height in 1 line steps, with X offset and width in 8 pixel steps Binning: 1X2, 2X1, 2X2, 2X4, 4X2, 4X4
EMVA 1288 Parameters	10-bit output format
Absolute sensitivity (mono)	TBD p (λ = TBD nm)
Maximum SNR (mono)	TBD dB
Traditional SNR*	>55 dB (0 dB gain, non-linear)
Video signal output	8/10/12-bit monochrome
Gain (digital)	Manual/automatic 0 dB to +24 dB
Gain (analog)	x1, x2, x4
Gamma	0.45, 0.6, 1.0 or 32-point LUT
Synchronization	Internal
Trigger input	TTL, CL, Pulse Generator, Software, NANDo, NAND1
Trigger modes	EPS, Trigger Width, Timed RCT (with ALC)
Electronic shutter	Timed exposure: 10 μs to 8 sec in 1 μs steps Auto shutter: 1/107 to 1/10,000 sec.
Auto Level Control (ALC)	Shutter range from 1/107 to 1/10,000, gain range from 0 dB to +24 dB Tracking speeds and max values adjustable.
Pre-processing functions	Flat field correction, blemish compensation (512 pixels)
High Dynamic Range mode (HDR)	4 user-selectable knee slopes – 70/80/90/100 dB
Operating temperature	-5°C to +45°C
Storage temperature	-25°C to +60°C
Humidity	20 - 80% non-condensing
Vibration	10 G (20Hz to 200Hz XYZ, 20 mins.)
Shock	80 G
Regulations	CE (EN61000-6-2, EN61000-6-3), FCC Part 15 class B, RoHS/WEEE
Power	Power over Mini-CL. 3.0W typical (full frame @ 12V)
Lens mount	C-mount
Dimensions (H x W x L)	29 mm x 29 mm x 41.5 mm (excluding lens mount)
Weight	46 g

Dimensions

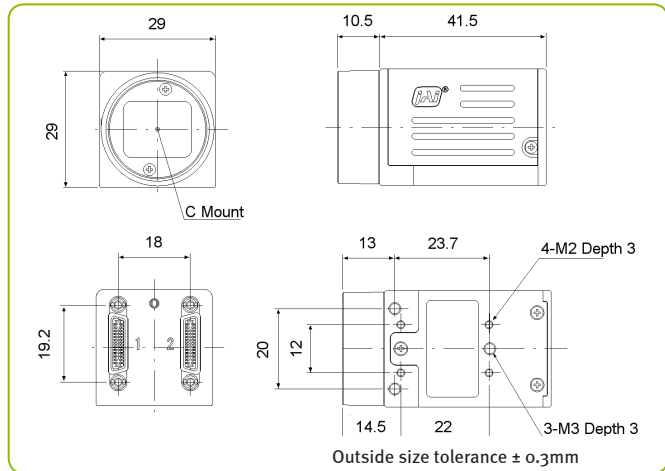

Connector pin-out


Mini-CL interface Interface 1



Pin	Signal	Function	
1	26	Power	+12V to +24V DC in
13	14	GND	Power return
2	15	-/+ TxOUT 0	CL Video Channel 1
3	16	-/+ TxOUT 1	
4	17	-/+ TxOUT 2	
5	18	-/+ TxClk	
6	19	-/+ TxOUT 3	
7	20	+/- RXD	Serial in
8	21	-/+ TXD	Serial out
9	22	CC1-/CC1+	Ext. trigger
10	23	CC2-/CC2-	Reserved
11	24	CC3-/CC3+	Not used
12	25	CC4-/CC4-	Not used

For Medium and Full implementations a second Mini-CL interface is provided. Video Channel 2 is on pin pairs (2,15), (3,16), (4,17), (5,18), and (6,19). Video Channel 3 is on pin pairs (8,21), (9,22), (10,23), (11,24), and (12,25). Consult manual for specific bit depths and pin assignments.

Spectral Response

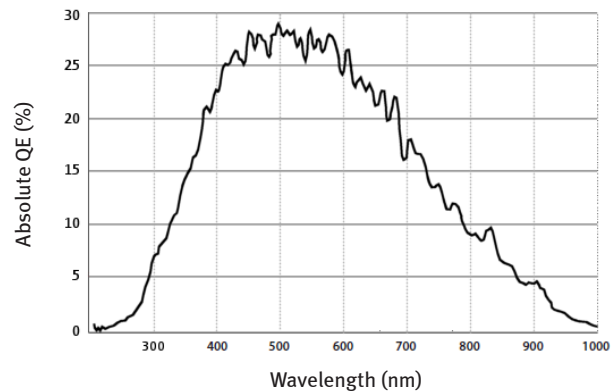

Ordering Information

GO-5000M-PMCL-UV | Monochrome UV camera with Mini Camera Link

*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time. For a more complete description, see the manual.

Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 3252

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300

Visit our web site on www.jai.com

See the possibilities

