




**iDS**

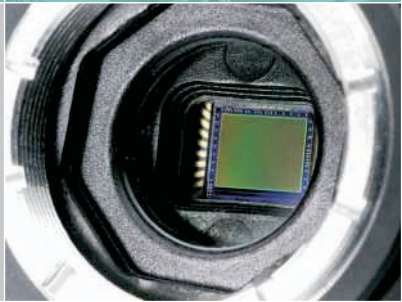

768  
576

**Gigabit Ethernet uEye<sup>®</sup> UI-6220-C/M**


**CCIR Camera with 1/2" CCD Sensor**

# Gigabit Ethernet uEye® UI-6220-M / UI-6220-C




## The Gigabit Ethernet uEye® family

The Gigabit Ethernet uEye® extends the broad range of USB cameras by powerful models for sophisticated, complex machine vision and image processing applications. The bandwidth is 2.5 times higher than with USB and cable lengths up to 100 m are possible.

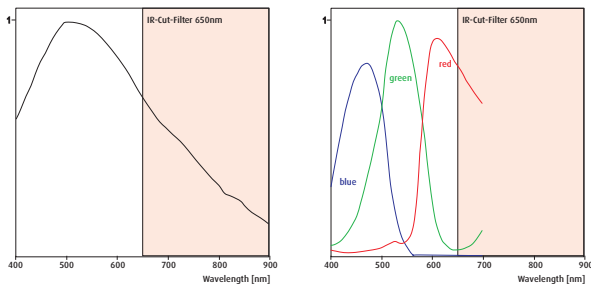


Sensor characteristics UI-6220-M

UI-6220-C

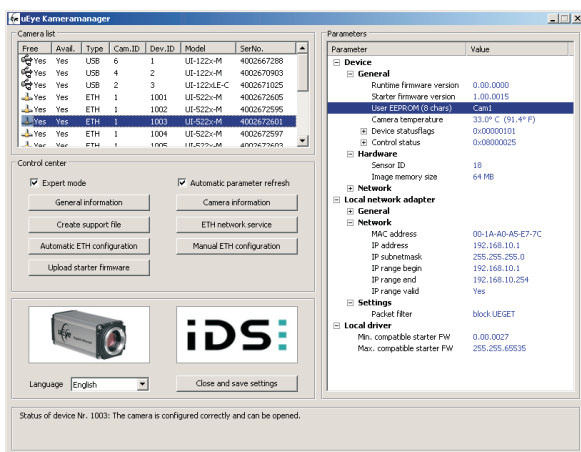

### Pin assignment MDR14 Multi I/O connector

Pin Notation	Description
1 GND	Ground
2 VCC	Power supply
3 TriggerGND	Trigger ground (potential-free)
4 TriggerIN	Trigger input (potential-free)
5 FlashOut	Flash output (potential-free)
6 VextL	External flash power supply (potential-free)
7 GND	Ground
8 GND	Ground
9 VCC	Power supply
10 GPIO1	General Purpose I/O 1 (not potential-free)
11 GPIO2	General Purpose I/O 2 (not potential-free)
12 RxD	RS232 RxD (not potential-free)
13 TxD	RS232 TxD (not potential-free)
14 GND	Ground



Power supply: 6 - 24V (12V recommended)

Connectors of the Gigabit Ethernet uEye® models

## The characteristics at a glance

Interface	Gigabit Ethernet
Sensor Technology	CCD (Sony)
Model description (color)	UI-6220-C
Model description (Mono)	UI-6220-M
Resolution (h x v)	768 x 576
Resolution Category / Pixel Class	CCIR
Sensor size	1/2"
Shutter	Global
max. fps in Freerun Mode at full resolution	52 fps
max. fps in SW Trigger Mode at 1 ms exposure	47 fps
Exposuretime in Freerun Mode	50 µs - 770 ms
Exposuretime in Trigger Mode	50 µs - 10 min
AOI Modes	H + V <sup>2</sup>
AOI with 320 x 240 Pixels (CIF)	97 fps
Subsampling Modes	-
Subsampling Factors	-
Resolution, fps	-
Binning Modes	V <sup>2</sup> (Mono)
Binning Method	V: Sum
Binning Factors	x2, x4
Resolution, fps	768 x 288, 90 fps 768 x 144, 143 fps
Mono: Maximum Gain	14x
Color: Maximum Gain RGB/Master	4x /8,9x
Additional Gain Boost with Factor	2x (Mono)
Sensor Model	ICX415
Pixel Clock	5 - 30 MHz
Pixelpitch in µm	8,3
Full Well Capacity	25.000 e-
Optical Size	6,37 x 4,78 mm
Aspect Ratio	4:3
Exact Real Diagonal	8,0 mm, 1/2,0"

### In scope of delivery:

Powerful, easy to handle uEye SDK  
uEye Demo and Programexamples  
executable and Source Code.  
uEye Camera Manager  
TWAIN, Active-X and Direct Show  
(WDM) drivers  
Interfaces for ActivVision Tools,  
Common Vision Blox, HALCON,  
LabVIEW and Neurocheck  
GenICam™ Interface<sup>2</sup>

Driver for Windows 2000, XP, VISTA  
and Linux<sup>2</sup>

<sup>2</sup> = Use increases frame rate

<sup>\*</sup> = in preparation