
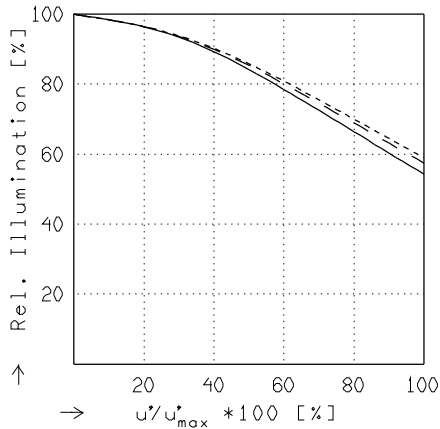


M-SR 5.6/120

f'	= 118.9 mm	β'_p	= 1.001
s_F	= -96.3 mm	s_{EP}	= 22.6 mm
$s_{F'}$	= 93.7 mm	$s_{A'P}$	= -25.3 mm
HH'	= 0.6 mm	Σd	= 48.5 mm

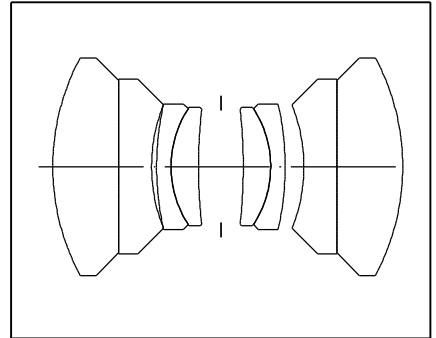


RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.

$$f / 5.6$$


—	$\beta' = -0.2600$	$u'_{max} = 45.1$	$00' = 727.$
- -	$\beta' = -0.3400$	$u'_{max} = 45.1$	$00' = 629.$
- · - ·	$\beta' = -0.3800$	$u'_{max} = 45.1$	$00' = 597.$

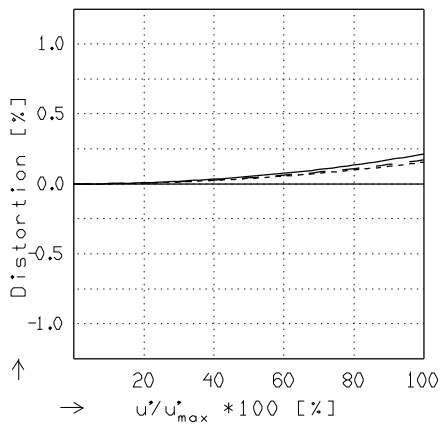

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0.2600$	$u'_{max} = 45.1$	$00' = 727.$
- -	$\beta' = -0.3400$	$u'_{max} = 45.1$	$00' = 629.$
- · - ·	$\beta' = -0.3800$	$u'_{max} = 45.1$	$00' = 597.$

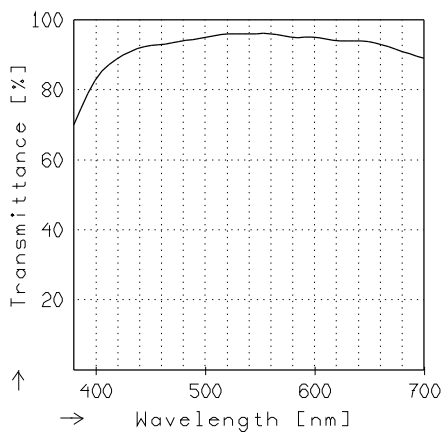

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.