
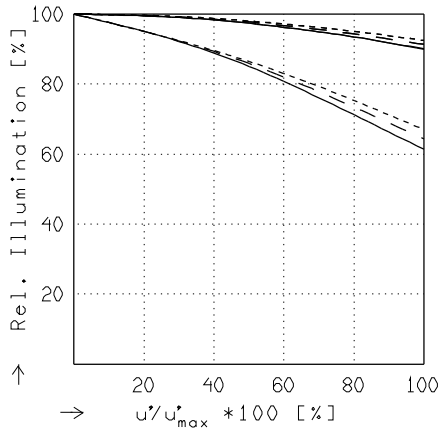


M-SR 5.6/120 BETA -0.625..-0.875


$f' = 120,2 \text{ mm}$ $\beta'_p = 0,994$
 $s_F = -94,8 \text{ mm}$ $s_{EP} = 26,1 \text{ mm}$
 $s_{F'} = 94,1 \text{ mm}$ $s_{A'P} = -25,4 \text{ mm}$
 $HH' = -1,2 \text{ mm}$ $\Sigma d = 50,4 \text{ mm}$

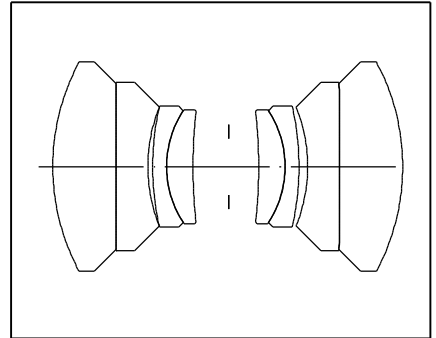

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	f / 5.6	f / 8.0	f / 11.0
—	$\beta' = -0.6250$	$u'_{max} = 45.0$	$00' = 507.$
- -	$\beta' = -0.7500$	$u'_{max} = 45.0$	$00' = 490.$
- · - ·	$\beta' = -0.8750$	$u'_{max} = 45.0$	$00' = 482.$

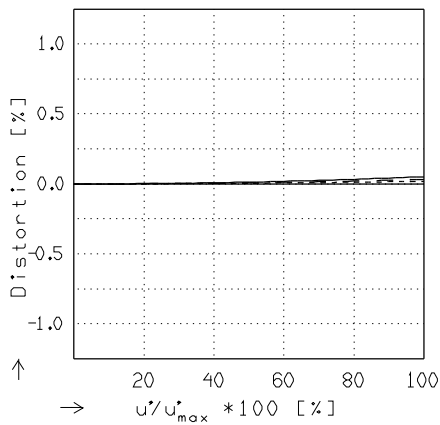

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0.6250$	$u'_{max} = 45.0$	$00' = 507.$
- -	$\beta' = -0.7500$	$u'_{max} = 45.0$	$00' = 490.$
- · - ·	$\beta' = -0.8750$	$u'_{max} = 45.0$	$00' = 482.$

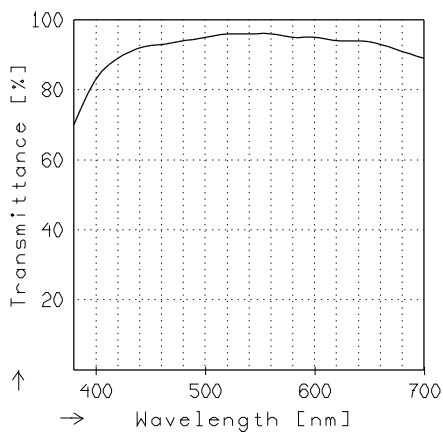

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.