
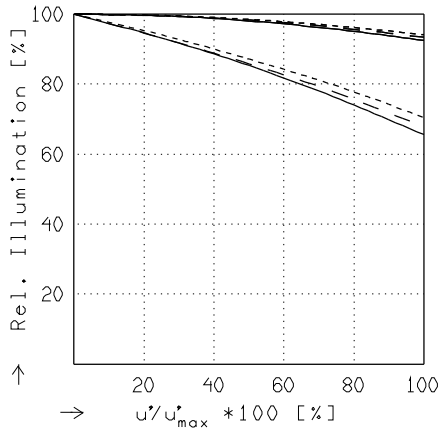


M-SR 5.6/120 BETA -0.875..-1.125


$f' = 120.7 \text{ mm}$ $\beta'_p = 1.002$
 $s_F = -94.3 \text{ mm}$ $s_{EP} = 26.1 \text{ mm}$
 $s_{F'} = 94.3 \text{ mm}$ $s_{A'P} = -26.6 \text{ mm}$
 $HH' = -1.8 \text{ mm}$ $\Sigma d = 50.9 \text{ mm}$

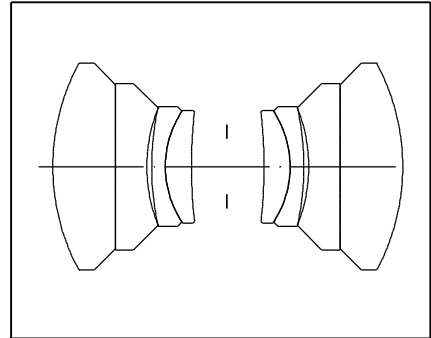

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 5.6$	$f / 8.0$	$f / 11.0$
—	$\beta' = -0.8750$	$u'_{\max} = 45.0$	$00' = 483.$
- -	$\beta' = -1.0000$	$u'_{\max} = 45.0$	$00' = 481.$
.....	$\beta' = -1.1250$	$u'_{\max} = 45.0$	$00' = 483.$

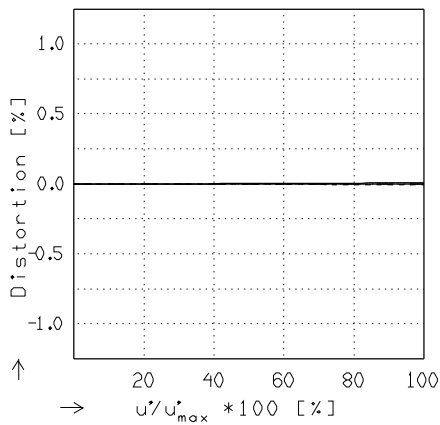

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0.8750$	$u'_{\max} = 45.0$	$00' = 483.$
- -	$\beta' = -1.0000$	$u'_{\max} = 45.0$	$00' = 481.$
.....	$\beta' = -1.1250$	$u'_{\max} = 45.0$	$00' = 483.$

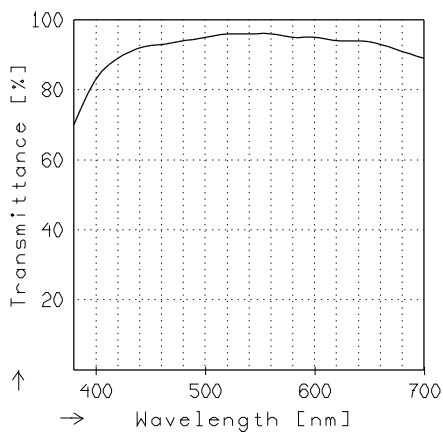

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.