

AL46120

20" Broad Area Linear Array

- Ai** Provides very even illumination along the 531mm length of the light, with controlled "fall off" in the transverse direction.
- Ai** Designed to provide low angle of incidence illumination over a long, wide area.



Ordering Information

Standard Product:
Shipped Next Day

AL46120

P/N: AL46120-660
Configured for use with Ai Power Supply


Standard Product Variation:
Shipped Within Two Weeks

AL46120	-	Spectral wavelength XXX	Optional power Compatibility XX
(UV)	395*	IC	
(blue)	470†	12	
(green)	520†	24	
(yellow)	590		
(orange)	625		
(red)	660		
(infra-red)	880		
(white)	WHI†		


*UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

†Not available in 12v

Light Set Up Diagram

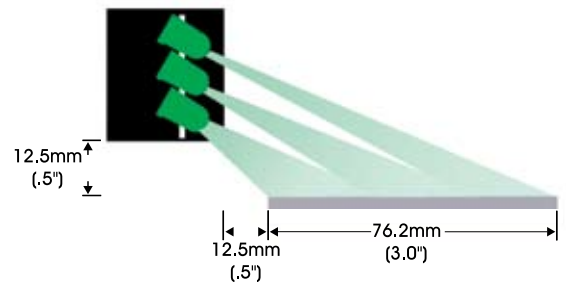

Dimensional Information

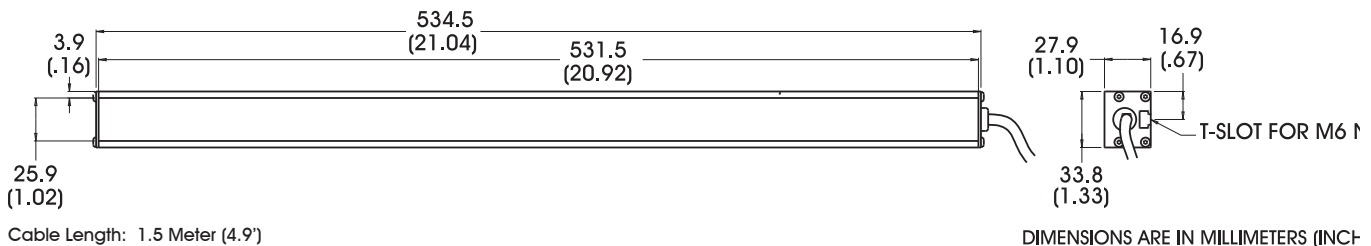

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	480	480	720	800	N/A	N/A	mA
@24	420	420	240	240	360	480	420	N/A	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C