

BL47192

8" x 8" Back Light

Aii 200mm x 200mm area of illumination

Aii Low profile housing



Ordering Information

Standard Product:
Shipped Next Day

BL47192-660

P/N: BL47192-660
Configured for use with an
Ai power supply.


Standard Product Variation:
Shipped Within Two Weeks

	Spectral wavelength		Optional power Compatibility
BL47192 -	XXX		XX
	(UV) 395*		IC
	(blue) 470†		12
	(green) 520†		24
	(yellow) 590		
	(orange) 625		
	(red) 660		
	(infra-red) 880		
	(White) WHI†		

*UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

† Not available in 12v

Dimensional Information

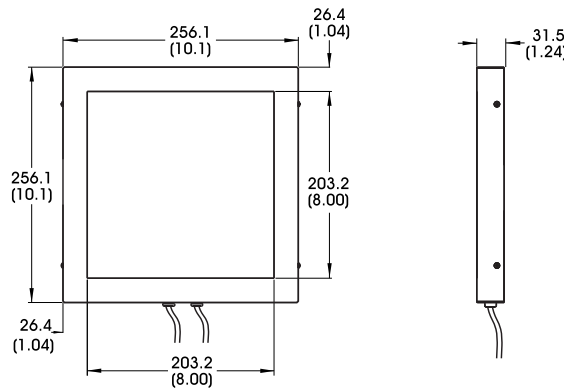

Dual Cable
Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	640	640	960	720	N/A	N/A	mA
@24	640	640	320	320	480	360	640	N/A	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C