

## LL068

### High Intensity Line Light

- 4i** Perfect for line scanning applications.  
90,000 Lux @ 3"; 50,000 hours life
- 4i** Modular design in 6" increments up to 96"



#### Ordering Information

Standard Product:  
Shipped Next Day

Standard Product Variation:  
Shipped Within Three Weeks

#### LL068


P/N: LL068-WHI24-002  
Configured for use with user  
supplied 24v power supply.

	Spectral wavelength		Optional power compatibility		Product Identifier	
LL068	-	XXX	-	XX	-	XXX
		(blue) 470		IC		###
		(green) 530		12		
		(red) 625		24		
		(white) WHI		C2		
				C3		

Individually assigned based on:  
length, LED color and lens.  
Please call for part number and pricing.

C2 = Ai Connector  
C3 = Pulsar Connector

#### Dimensional Information

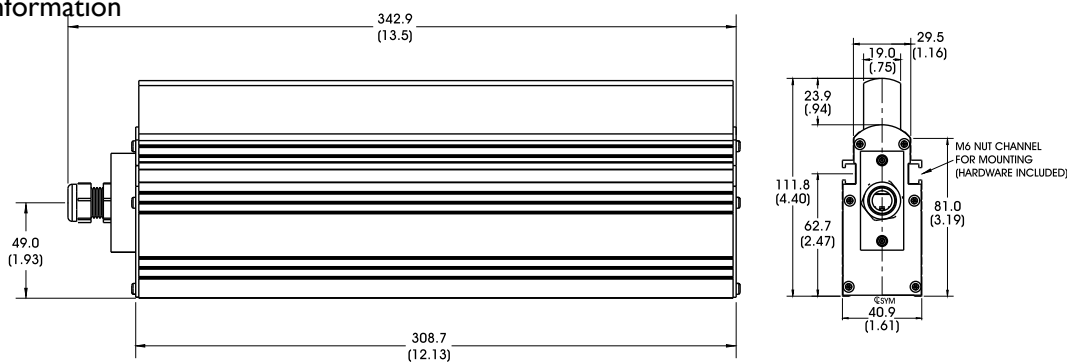

DIMENSIONS ARE IN MILLIMETERS (INCHES)

#### Standard Variation Current Specifications

Maximum draw per 152mm (6") length

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	N/A	N/A	1400	N/A	N/A	N/A	mA
@24	1000	1000	N/A	N/A	700	N/A	1000	N/A	mA

#### Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C