

RL36120

Bright Field Ring Light



- 4i** Intense illumination for large areas, where specular reflection is not a problem
- 4i** Available in the RGB "All Color" version


Ordering Information

Standard Product:
Shipped Next Day


RL36120-660200XL

Configured for use with Ai Power Supply

Standard Product Variation:	Mounting option	Spectral wavelength	Stand off	Field of view	Optional power Compatibility	Optional Light Conditioning
RL36120	X	XXX	XXX	XXX	XX	X
	B	(UV) 395* (blue) 470† (green) 520† (yellow) 590 (orange) 625 (red) 660 (infra-red) 880 (white) WHI† (all color) RGB†	See chart to compute standoff.	XXL XL L M S XS	IC 12 24	D (Diffuser) P (Polarizer)

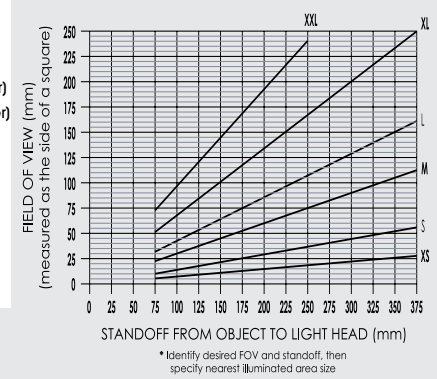


* UV LEDs have a considerably shorter half-life than other LEDs (< 1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only.

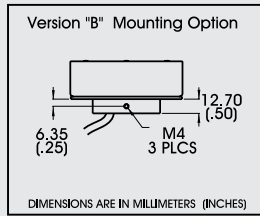

† Not available in 12v

Dimensional Information

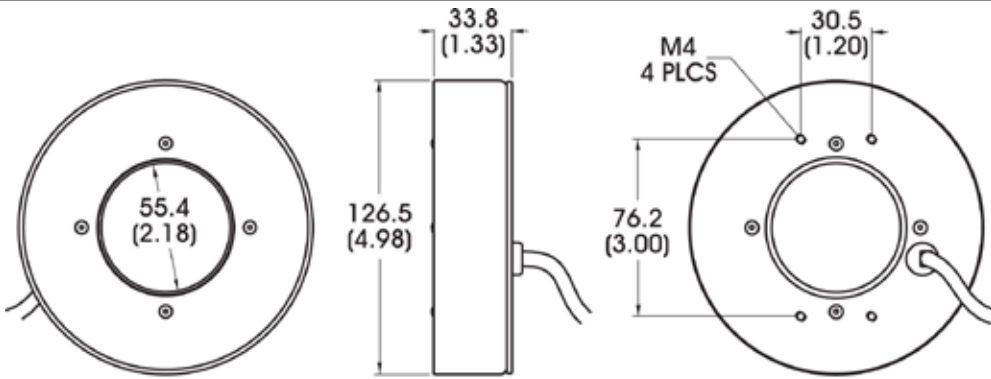

Cable length: 1.5 Meters (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	400	400	600	640	N/A	N/A	mA
@24	480	480	240	240	360	280	480	440	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C