

RL5064

Combination Bright Field/Dark Field Illuminator



- 4i) Dual Functionality - bright field and dark field illumination in a compact housing
- 4i) Bright Field and Dark Field can be used independently


Ordering Information

Standard Product:
Shipped Next Day

Standard Product Variation:
Shipped Within Two Weeks

RL5064-660

Configured for use with Ai
Power Supply




Mounting option	Spectral wavelength	Optional power Compatibility
RL5064 X	-	XXX XX
B	(UV) 395*	IC
	(blue) 470†	12
	(green) 520†	24
	(yellow) 590	
	(orange) 625	
	(red) 660	
	(infra-red) 880	
	(white) WHI†	

* UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

† Not available in 12v

Dimensional Information

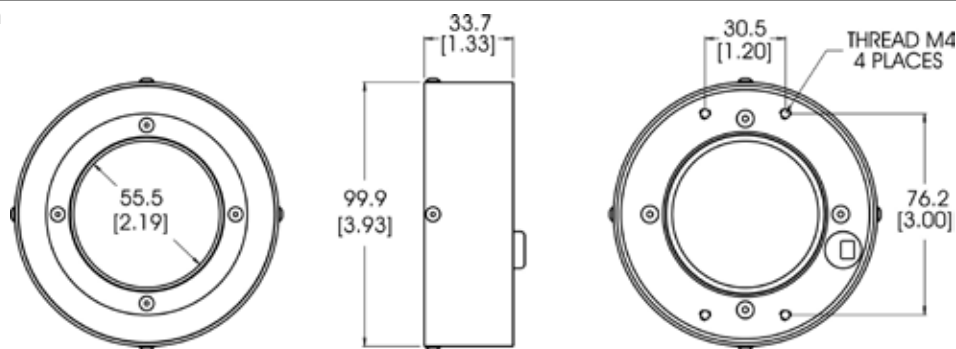

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	360	360	360	360	N/A	N/A	mA
@24	360	360	360	360	360	360	360	N/A	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C