

# FXO 10GigE

fxo530CXGE



Preliminary product information. Features and technical specifications are subject to change without notice.

## General

Model:	fxo530CXGE
Product code:	F002444
Product series:	FXO 10GigE
Status:	Prototype/engineering sample

## Sensor

Sensor type:	Area scan
Chroma:	Mono
Spectrum:	Visible
Spectral range:	400 nm to 1000 nm
Resolution:	5,328 × 4,608 (24.60 MP)
Sensor model:	Sony IMX530
Sensor architecture (material):	cmos
Shutter type(s):	global-shutter
Sensor size:	14.6 × 12.63 mm (19.3 mm, 19.3mm (Type 1.2))
Pixel size:	2.74 μm × 2.74 μm

## Pixel formats

Sensor bit depth:	8-Bit,12-Bit
Monochrome pixel formats:	mono8, mono12

## Timing and gain

Max. frame rate:	47.2 fps
Exposure time:	5 $\mu$ s to 60 s
Gain:	0.0 dB to 48.0 dB

## I/Os and power

Non-isolated lines:	0 x LVDS input, 0 x LVDS output, 0 x TTL input, 0 x TTL output, 2 x 24V input, 4 x Open drain output,
Specific non-isolated lines:	1 x RS232 input, 1 x RS232 output, 0 x RS422 input, 0 x RS422 output,
Opto-isolated lines:	1 x Optical isolated input, 0 x Optical isolated input,
Power supply:	10 to 25VDC
Power consumption:	External: 12 W (typical)

## Operating conditions

Operating temperature (housing):	-10 °C to 60 °C
----------------------------------	-----------------

## Mechanical properties

Body dimensions (L x W x H in mm):	76 × 50 × 50
Filter/protection glass:	K9 - AR coating - 400-850nm
IP class:	IP30
Lens mount(s):	C-Mount
Weight:	240 g

## On-board memory and FPGA

Image buffer (RAM):	896 MByte
Non-volatile memory (Flash):	32 MByte

## Interfaces

Digital interface:	10gige
Interface connector:	(RJ-45)

## FW features - image control

Exposure modes:	Manual, Auto, External
Gain modes:	Auto, Manual
Image control features:	FW Features - Image Control

## FW features - camera control

Trigger modes/sync:	INTERNAL,SOFTWARE,EXTERNAL
---------------------	----------------------------

## FW features - camera control


Camera control features:

PTP, RDMA support, User Sets, PWM(4), Sequencer,




preliminary

## Color



(not included: lens- and light source characteristics)

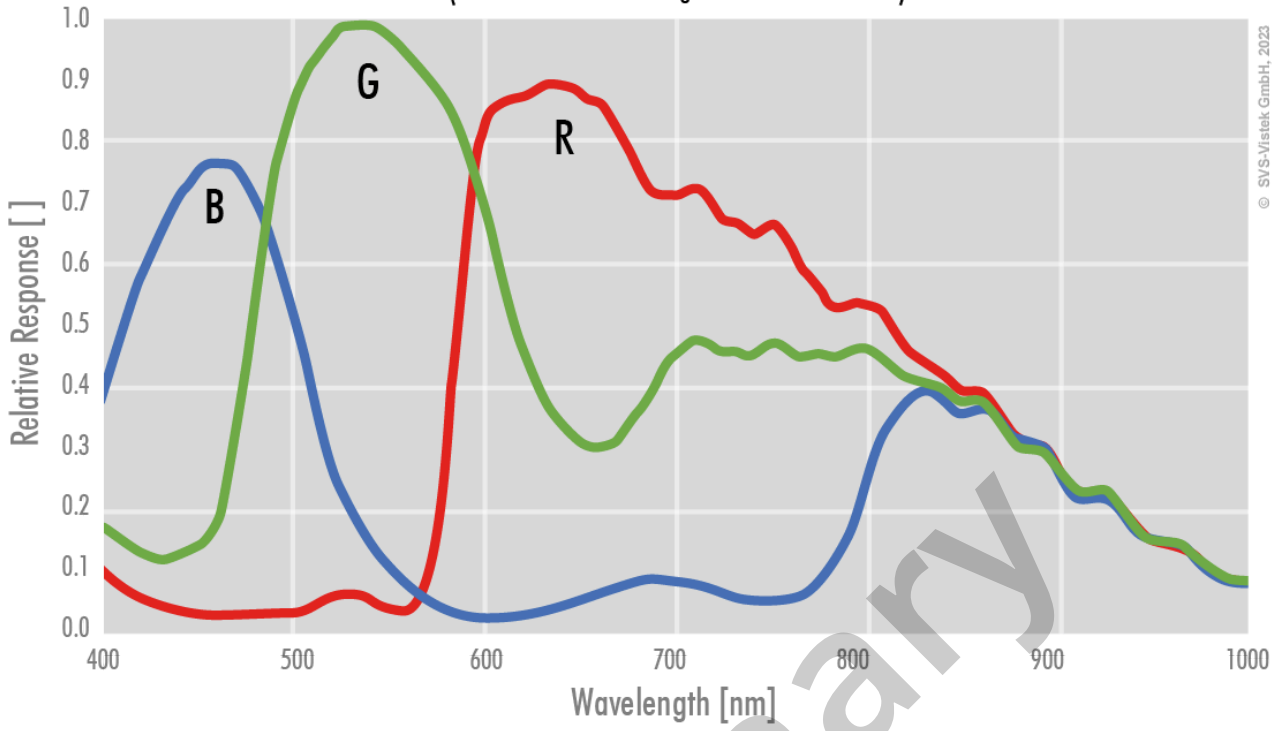


preliminary

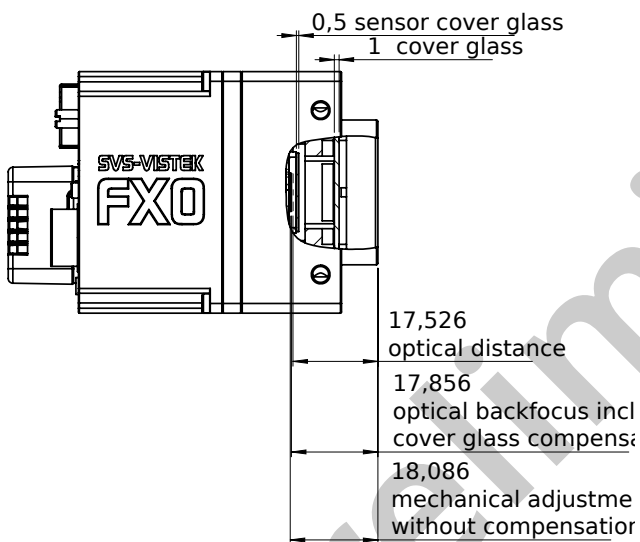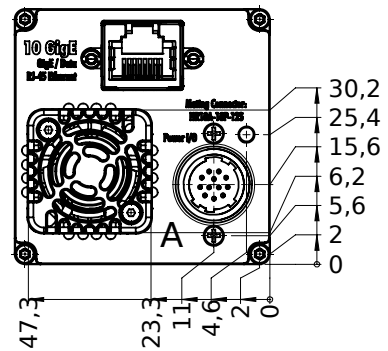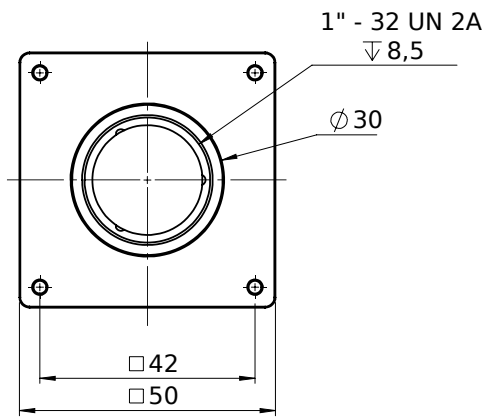


M4 - 6H  $\nabla$  5  
 same from left

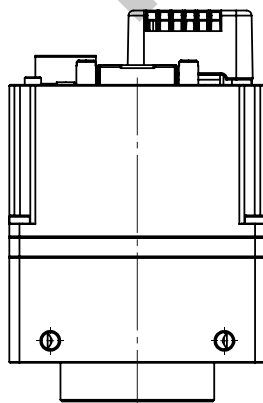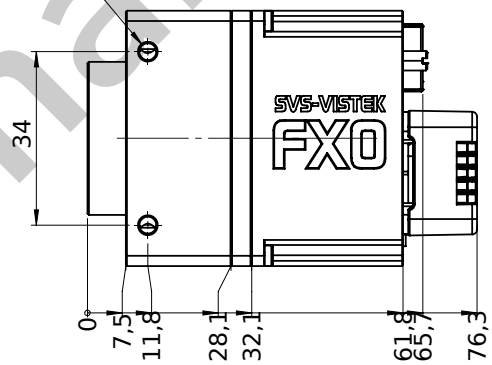

1/4 - 20 UNC  
 $\nabla$  5,0  
 M4 - 6H  $\nabla$  5  
 same from top

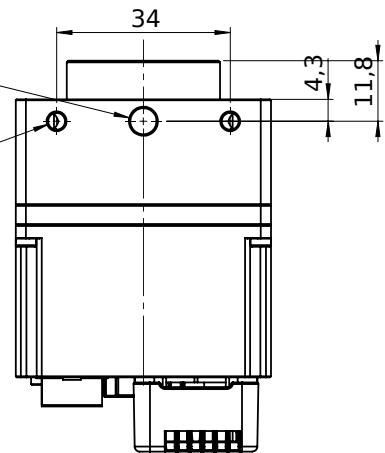

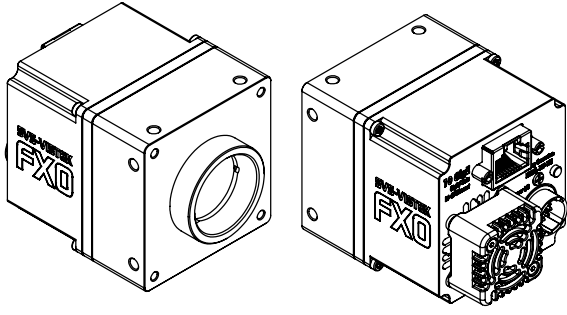

## I/O pin assignment

Hirose 12 Pin



1	VIN -	(GND)	7	OUT 1	(open drain)
2	VIN +	(10 V to 25 V DC)	8	OUT 2	(open drain)
3	IN 4	(RXD RS232)	9	IN 3 +	(opto In +)
4	OUT 4	(TXD RS232)	10	IN 3 -	(opto In -)
5	IN 1	(0-24V)	11	OUT 3	(open drain)
6	IN 2	(0-24V)	12	OUT 0	(open drain)

preliminary