

overview

- 3200 × 2200 px
- Sony IMX420
- 1.1" CMOS
- 174 fps
- 10 GigE
- available



technical data

sensor information

sensor	Sony IMX420
resolution	3200 × 2200 px
exposure time	0,001 ... 60000 ms
pixel size	4.5 × 4.5 µm
shutter type	Global shutter
sensor type	1.1" CMOS

acquisition formats

image formats, interface frame rate max.	Full Frame, 3200 × 2200 px, max. 174 fps
image formats, acquisition frame rate max. (Burst Mode)	Full Frame, 3200 × 2200 px, max. 209 fps
pixel formats	Mono8 Mono10 Mono12 Mono12 Packed

image preprocessing

analog controls	Gain (0 ... 48 dB) Offset (0 ... 255 LSB 12 Bit)
color models	Mono

camera features

synchronization	free running trigger
trigger sources	Hardware software ActionCommand
trigger delay	0 ... 2 sec, tracking and buffering of up to 256 trigger signals

camera features

internal image buffer	1024 MB 78 images (Trigger Mode) 1 image (Free Running Mode)
-----------------------	--

interfaces and connectors

data interface	10 Gigabit Ethernet, Transfer rate 10000 Mbits/sec, Gigabit Ethernet, Transfer rate 1000 Mbits/sec, Fast Ethernet, Transfer rate 100 Mbits/sec, Connector: M12 / 8-pol x-coded (SACC-CI-M12FS-8CON-L180-10G)
process interface	M12 / 12 pins a-coded (SACC-CI-M12MS-12CON-L180)
power supply	via M12/12 pins a-coded

mechanical data

lens mount	C-mount
width	60 mm
height	60 mm
depth	99,7 mm
weight	≤ 485 g
material	aluminum

electrical data

voltage supply range +Vs	12 ... 24 V DC (external power supply)
power consumption	approx. 10,5 W @ 12 VDC and 69 fps

non-volatile memory

flash memory size	128 kB
-------------------	--------

environmental conditions

operating temperature	0 ... +60 ° @ T = measurement point
-----------------------	-------------------------------------

VLXT-71M.I

Gigabit Ethernet, 7,0 Megapixel, Monochrome

Article number: 11700327

technical data

environmental conditions

humidity	10 ... 90 % (non-condensing)
protection class	IP 40 IP 54 (with mounted tube and cable) IP 65 (with mounted tube and cable) IP 67 (with mounted tube and cable)


conformity

conformity	CE RoHS
------------	------------

digital I/Os


lines	2 input lines 4 output lines with pulse width modulation (PWM) (max. 48 V / max. 2,5 A) RS232
-------	---

dimension drawing

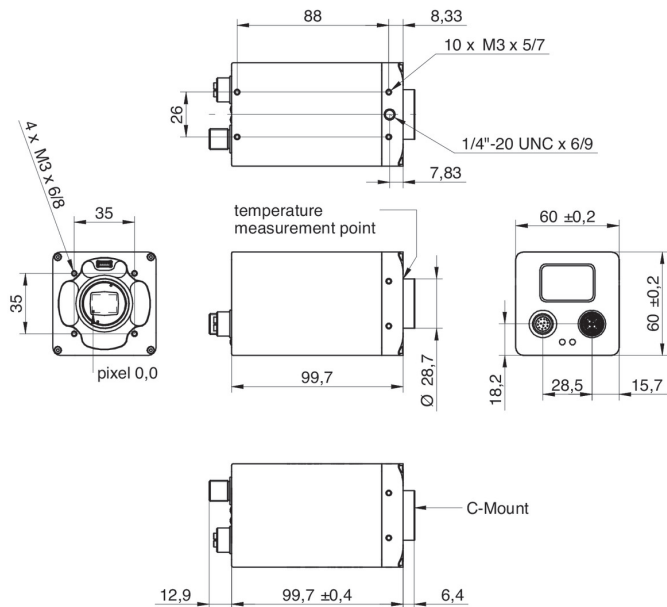


Principle


Optional accessories for protection class IP65/67:

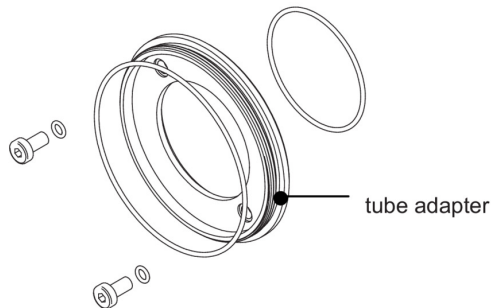

- tube adapter
- Ø 49,5 mm, hard-anodized, incl. sealing and screws (VCXG.I 11185373)
 - Ø 65 mm, hard-anodized, incl. sealing and screws (VCXG.I 11185377; VLXT 11193125)

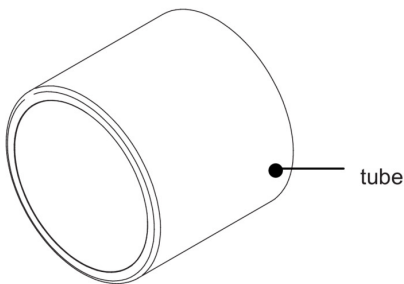

- tube
- Ø 49,5 mm, length 44 mm, hard-anodized, cover glass PMMA (11185370)
 - Ø 65 mm, length 58 mm, hard-anodized, cover glass PMMA (11185374)
 - Ø 49,5 mm, length 44 mm, hard-anodized, tempered laminated safety glass (11195425)
 - Ø 65 mm, length 58 mm, hard-anodized, tempered laminated safety glass (11195426)

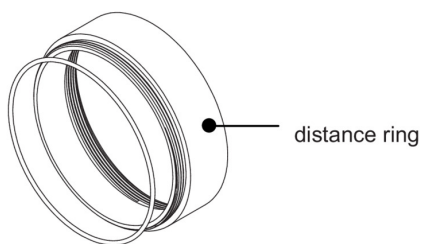

- distance ring
- Ø 49,5 mm, length 6 mm, hard-anodized, incl. sealing (11185372)
 - Ø 49,5 mm, length 12 mm, hard-anodized, incl. sealing (11185371)
 - Ø 49,5 mm, length 36 mm, hard-anodized, incl. sealing (11211571)
 - Ø 65 mm, length 6 mm, hard-anodized, incl. sealing (11185376)
 - Ø 65 mm, length 12 mm, hard-anodized, incl. sealing (11185375)
 - Ø 65 mm, length 36 mm, hard-anodized, incl. sealing (111988906)