


In development

The model is not yet in series production, but will be introduced shortly.

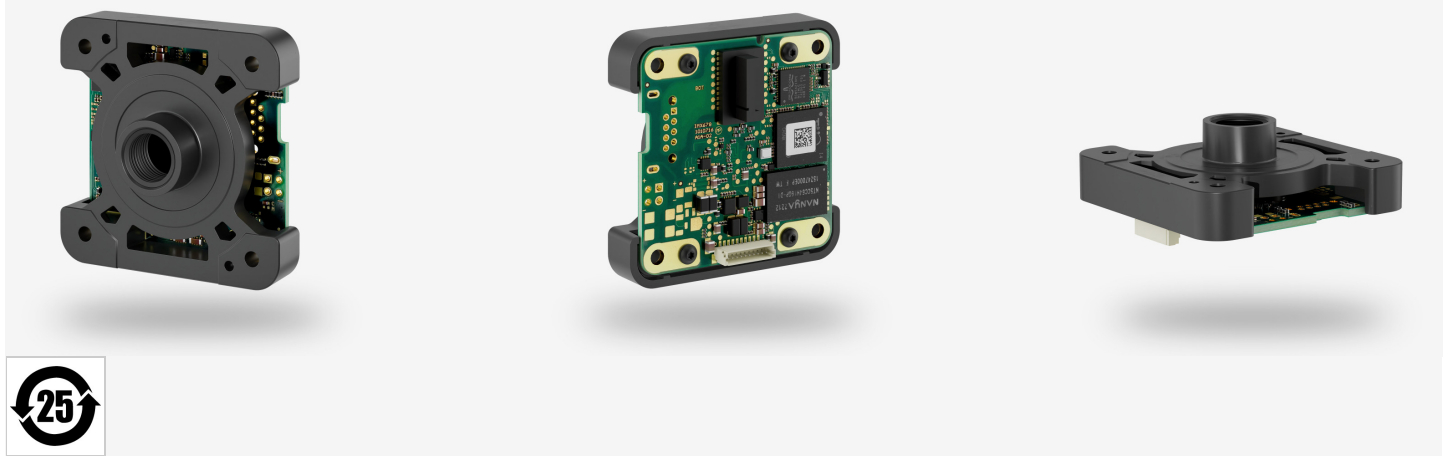


Specification

- PRELIMINARY -

Sensor

Sensor type	CMOS Mono
Shutter	Global Shutter
Sensor characteristic	Linear
Readout mode	-
Pixel Class	5 MP
Resolution	5.01 Mpix
Resolution (h x v)	2448 x 2048 Pixel
Aspect ratio	5:4
ADC	12 bit
Color depth (camera)	0 bit
Optical sensor class	1/1.8"
Optical Size	6.707 mm x 5.612 mm
Optical sensor diagonal	8.75 mm (1/1.83")
Pixel size	2.74 µm
Manufacturer	Sony
Sensor Model	IMX568-AAMJ-C
Gain (master/RGB)	-/-
AOI horizontal	
AOI vertical	
AOI image width / step width	- / -
AOI image height / step width	- / -
AOI position grid (horizontal/vertical)	- / -
Binning horizontal	
Binning vertical	
Binning method	
Binning factor	-
Subsampling horizontal	
Subsampling vertical	
Subsampling method	
Subsampling factor	-

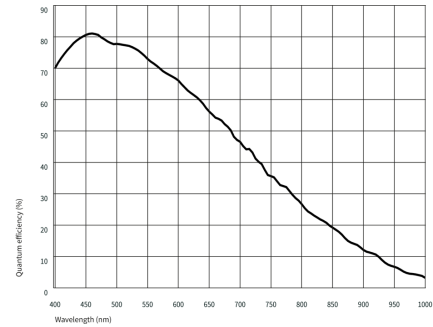

Model

Frame rate freerun mode	-
Frame rate trigger (maximum)	-
Exposure time (minimum - maximum)	-
Power consumption	2.8 W - 4.2 W

Ambient conditions

For PCB versions, refer to the separate hints in the respective documentation.


Allowed device temperature during operation	°C - °C / 32 °F - 32 °F
Allowed device temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	20 % - 80 %

Connectors

Interface connector	ZIF
I/O connector	10-pin Wuerth connector (WR-WTB 1.00 mm)
Power supply	12 V - 24 V

Pin assignment I/O connector

1	Power supply (VCC) 12-24 V
2	Power supply, ground
3	General Purpose I/O (GPIO) 2, 3.3 V - Line 3
4	General Purpose I/O (GPIO) 1, 3.3 V - Line 2
5	I2C SCL (signal clock) 3.3 V
6	I2C SDA (signal data) 3.3 V
7	Trigger input without optocoupler 3.3 V - Line 0
8	Flash output without optocoupler 3.3 V - Line 1
9	Ground (GND)
10	Voltage output 3.3 V, max. 100 mA



Design

Lens Mount	S-Mount
IP code	
Dimensions H/W/L	50.0 mm x 50.0 mm x 23.5 mm
Mass	27 g

Features

Image Acquisition

Freerun	-
Software trigger	-
Hardware trigger	-
Trigger controlled exposure	-
Denoiser	-
Long exposure	-
Line scan	-

Flashing

Flashing	-
PWM flashing	-

Image Adjustments

Auto exposure	-
Auto gain	-
Auto whitebalance	-
Color correction	-
Gamma	-
LUT	-
Mirror/flip	

On-board Image Processing

Pixel formats	
Region of interest	✓
Decimation (FPGA)	-
Decimation (Sensor)	
Binning (FPGA)	-

Others

IP settings	-
Bandwidth management	-
Chunks	-
Sequencer	-
PTP	-
Firmware update	-
1st supported firmware version	

More functionality like auto features are available by using the IDS peak software