

■ 4 x 4096 pixels

■ 72 kHz

Sweep+ Series 

❖ SW-4000Q-10GE

4-CMOS prism line scan camera

GIG[®]
VISION




- **World's first 4 x 4096 pixel prism-based 10GBASE-T line scan camera**
- **Max. line rate of 72 kHz for RGB8 + NIR dual-stream output**
- **Prism technology for superior color quality and alignment of visible + NIR channels**
- **Backwards compatible to NBASE-T (5GBASE-T/2.5GBASE-T) and standard GigE (1000BASE-T)**
- **Optimized for applications with fixed and varying object speeds**
- **New "State of the art" CMOS sensors with selectable pixel size - 7.5 x 7.5 μ m or 7.5 x 10.5 μ m**
- **Supports vertical dual-line binning, 2x horizontal binning, or both**
- **Flat field correction and color shading correction**
- **HSI and XYZ color space conversion**
- **Supports direct connection to rotary encoders plus large variety of trigger options**
- **GigE Vision 2.0 interface with choice of single-stream or dual-stream output**
- **Output formats include 3 x 8-bit or 3 x 10-bit RGB, 8-bit YUV, and 8-bit/10-bit NIR**
- **Excellent shock and vibration resistance**

Specifications for SW-4000Q-10GE

Sweep+ Series


Specifications	SW-4000Q-10GE
Scanning system	4 high-speed CMOS line sensors, prism-mounted
Active pixels	4 x 4096 pixels (R, G, B, NIR)
Line rate (full width)	Up to 72 kHz (variable) for 8-bit RGB + NIR 74 kHz possible with YUV compression
Sensor width	30.72 mm
Pixel size	Mode A: 7.5 µm x 7.5 µm Mode B: 7.5 µm x 10.5 µm
Ethernet speeds	10GBASE-T, 5GBASE-T, 2.5GBASE-T, 1000BASE-T Full backwards compatibility
Video output	Single stream: RGBa8 Two streams: RGB8, RGB10V1Packed, RGB10p32, YUV422_8_UVYV, YUV422_8 (visible) Mono8, Mono10Packed (NIR)
Object illuminance (min.)	300 lx @ 7800 K, Mode A (Gain 18 dB, 525 µs exp., 50% video, f/2.8)
Responsivity	RGB: 118 DN/nJ/cm ² @ 550 nm (G channel) NIR: 64 DN/nJ/cm ² @ 800 nm (Mode A, 10-bit, 0 dB gain)
S/N ratio	>55 dB on green, 10-bit with 0 dB gain
Inputs (Trigger)	1 Opto In + 1 TTL via 12-pin, 2 TTL via 10-pin, Pulse Generator (4), NAND Out (2), Action (4), User Out (4)
Outputs	2 TTL via 12-pin, 2 TTL via 10-pin
Gain	Analog Base Gain: 0 dB / 6 dB / 12 dB Digital Master: 0 to +18 dB, R/B/NIR: -4 to +12 dB Digital Individual: 0 to +24 dB
White balance	Manual/one-push auto by gain or exposure
Gamma	0.45 to 1.0 (9 steps) or 257-point LUT
Image processing	PRNU/DSNU, black level, flat shading and color shading correction, chromatic aberration adjustment, horizontal mirroring
Color space conversion	RGB or RGBa8 to HSI, XYZ (CIE), sRGB, Adobe RGB, or User Custom RGB
Exposure modes	No shutter, timed, and trigger width control
Electronic shutter	3 µs to 13889 µs in 1 µs increments at 72 kHz. Exposure time can be longer at slower line rates.
Pulse width control	1.8 µs to ~1 sec
Time synchronization	Support for Precision Time Protocol (IEEE 1588)
Lens mount	M52 mount or Nikon F-mount (46.5 mm flange back for both mounts)
Operating temp. (ambient)	-5°C to +45°C (20 to 80% non-condensing)
Storage temp. (ambient)	-25°C to +60°C (20 to 80% non condensing)
Vibration	3G (20 Hz to 200 Hz, XYZ directions)
Shock	50G
Regulations	CE (EN61000-6-2, EN61000-6-3) FCC Part 15 Class B, RoHS/WEEE
Power	12-pin PoE +10V to +25V DC. 19.3 W typical @ 12V Not supported.
Dimensions (H x W x L)	(without connector and lens mount protrusions) 90 mm x 90 mm x 120 mm
Weight	980 g

Dimensions (F-mount)

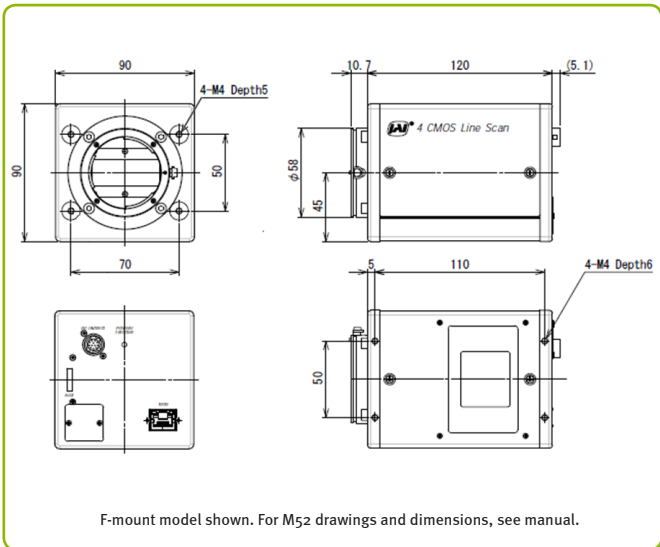

Connector pin-out


DC In / Trigger



HIROSE HR10A-10R-12PB(71)

Pin	Signal
1	Ground
2	DC in +10V to +25V
3	Ground
4	Reserved
5	Opto in 1-
6	Opto in 1+
7	TTL out 4
8	NC
9	TTL out 1
10	TTL in 1
11	DC in +10V to +25V
12	Ground


GigE Vision Interface



RJ-45 with locking screws

Pin	Signal
1	TRD+ (0)
2	TRD- (0)
3	TRD+ (1)
4	TRD+ (2)
5	TRD- (2)
6	TRD- (1)
7	TRD+ (3)
8	TRD- (3)

Spectral response

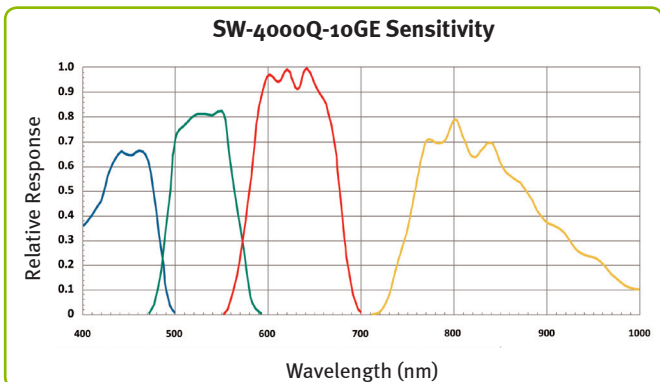

Ordering Information

SW-4000Q-10GE-F	4-CMOS prism line scan camera with F-mount
SW-4000Q-10GE-M52	4-CMOS prism line scan camera with M52 mount

Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 8880

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300