

Piranha2 P2-2x-xxx40 (10 μm)

Line Scan Cameras



Key Features

- 80 MHz throughput
- 10 μm pixels
- Resolutions from 1k to 4k
- High responsivity
- Base Camera Link™
- Single 12 V to 15 V power supply
- Compact design

Programmability

- Programmable pixel to pixel correction
- Adjustable analog and digital gain and offset
- 8 or 10 bit output
- Adjustable integration time and line rate
- Test pattern, line statistics, and camera diagnostics

Typical Applications

- Printed circuit board inspection
- High performance document scanning/image lift
- Postal/parcel sorting
- Flat panel display inspection
- General machine vision

Overview

Base Camera Link, 10 μm pixels and resolution up to 4k with proven performance.

Piranha2 delivers superb performance with a wide selection of resolutions. Base Camera Link with two 8 or 10 bit outputs at 40 MHz deliver 80 MHz throughput, and boosted responsivity means the Piranha2 needs less light. Our 10 μm models are available in resolutions from 1k to 4k.

The camera is small, light, and uses a single power supply. The compact design is shallow and small. Cabling interfaces are simplified with the Base Camera Link™ high-speed serial standard. The camera is very sensitive, but still provides quieter, more uniform output thanks to CDS (correlated double sampling) and embedded flat-field correction algorithms. Gain and offset are fully programmable for each output channel, and the camera can output test patterns for cable/system troubleshooting. All resolutions provide appropriate, readily-available standard lens options (C mount, F mount, and M72 x 0.75).


Specifications

Resolution	1024 / 2048 / 4096
Data Rate	2 x 40 MHz
Max. Line/Frame Rate	65 / 35 / 18 kHz
Pixel Size	10 μm
Data Format	8, 10 bit
Output	Base Camera Link
Lens Mount	M72 x 0.75, C, F mount
Responsivity	76 DN/(nJ/cm ²) @ 10 dB
Dynamic Range	54 dB
Nominal Gain Range	± 10 dB
Size	50 x 85 x 50 / 85 x 85 x 53.7 mm
Mass	<450 g
Operating Temp	10 °C to 50 °C
Power Supply	12 V to 15 V
Power Dissipation	<9 W
Regulatory Compliance	CE
Control	MDR26 Camera Link
Data	Shared with Control
Power	Hirose HR10 6 pin
Example Part Number	P2-22-04K40


Piranha2 P2-2x-xxx40 (10 μm)

Line Scan Cameras





With established performance and wide customer base, the Piranha2 is the camera generation known to have brought line scan performance to the next level.

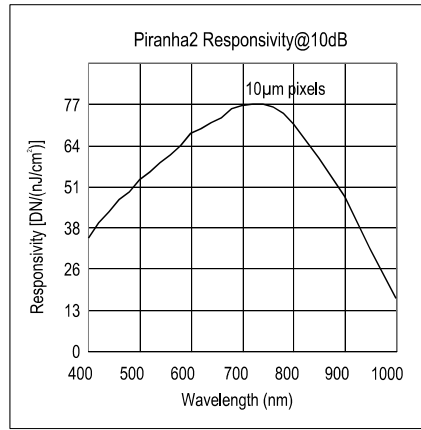


1k/2k, 10 μm 2 TAP WITH C-MOUNT








1k/2k, 10 μm 2 TAP WITH F-MOUNT



4K 10 μm 2 TAP WITH LARGE FORMAT ADAPTER



4K 10 μm 2 TAP WITH F MOUNT



All units in mm.

