


NOMINAL WORKING DISTANCE =  
94 mm ± 3%

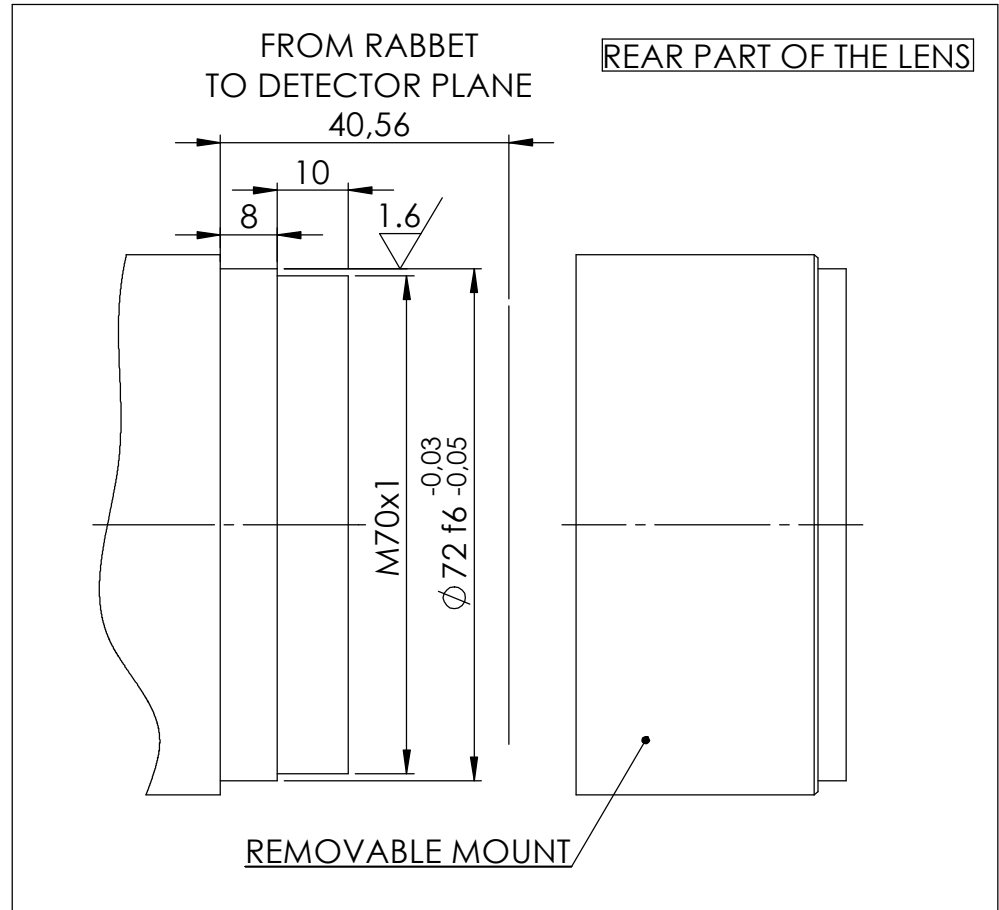

$\phi 75 h8 -0.05$   
CLAMPING DIAMETER

$\phi 75 h8 -0.05$   
CLAMPING DIAMETER

FLANGE  
DISTANCE  
6,56

OPTIONAL  
PIRANHA MOUNT

Material		N.A.		Mass		1480 g		Scale		1:1	
Surface treatment		N.A.		Project-Prod.item/Instrument		MC12K200X		Description		Layout	
Geometrical tolerance (ISO 2768-2)				Class		K		Undimensioned bevels		0.5x45°	
Linear tolerance (ISO 2768-2)				Class		m		Undimensioned radii		R 0.5	
0.5	>3÷	>6÷	>30÷	>120	>400÷	>1000	>2000	Drawing No.		Sheet	
±3	6	30	120	±400	1000	±2000	±4000	21291-0-A		1/1	
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	Date		Name	
Designed				28/02/13		A.Vasconetto		Date		Name	
Draw				28/02/13		A.Vasconetto		Checked		X	
Checked						C.Sedazzari		Reproduction forbidden without specific authorization			
<p><b>OPTO ENGINEERING S.r.l. - 46100 Mantova Italy - Via Cremona, 29/2 - Tel. +39 0376 263565 - e-mail: info@opto-engineering.com - http://www.opto-engineering.com</b></p>											