

LTCLHP024-G

Telecentric HP illuminator, beam diameter 30 mm, green

Optical specifications

Beam diameter	(mm)	30
Working distance range	(mm)	45 ~ 90
Light color, peak wavelength		green, 520 nm

Mechanical specifications

Length (1)	(mm)	124.7
Outer diameter	(mm)	44
Mass	(g)	284

Electrical specifications

Device power ratings


DC voltage minimum	(V)	12
DC voltage maximum	(V)	24
Power consumption	(W)	< 2.5
Max LED forward current (2)	(mA)	350

LED power ratings

Forward voltage (typical) (3)	(V)	3.3
Forward voltage (max) (3)	(V)	4.00
Max pulse current (4)	(mA)	2000

Compatible telecentric lenses

Compatibility	TC12024, TC23024, TC4M024-X, TC2M024-X, TC16M009, TC16M012, TC16M018
---------------	----------------------------------------------------------------------

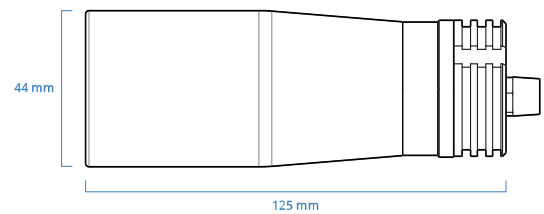

NOTES

1. Nominal value, with no spacers in place.
2. Used in continuous (not pulsed) mode.
3. At max forward current. Tolerance is $\pm 0.06V$ on forward voltage measurements.
4. At pulse width ≤ 10 ms, duty cycle $\leq 10\%$ condition. Built-in electronics board must be bypassed (see tech info).

COMPATIBLE PRODUCTS



CMHO 024
Clamping mechanics for TCxx024 lenses and LTCL024-X illuminators



LTSCHP 1W-G
Replacement LED module, green



LED1W-G
Replacement LED source for LTSCHP1W series, green



CB244P1500
Power cable for LTSCHP1W LED modules