

# LTCLHP096-B

Telecentric HP illuminator, beam diameter 120 mm, blue

## Optical specifications

Beam diameter	(mm)	120
Working distance range	(mm)	200 ~ 250
Light color, peak wavelength		blue, 460 nm

## Mechanical specifications

Length (1)	(mm)	322.2
Outer diameter	(mm)	143
Mass	(g)	2161

## Electrical specifications

### Device power ratings


DC voltage minimum	(V)	12
DC voltage maximum	(V)	24
Power consumption	(W)	< 2.5
Max LED forward current (2)	(mA)	350

### LED power ratings

Forward voltage (typical) (3)	(V)	3.3
Forward voltage (max) (3)	(V)	4.00
Max pulse current (4)	(mA)	2000

## Compatible telecentric lenses

Compatibility	TC13096, TC12085, TC12096, TC4M085, TC4M096, TC2M096, TC16M096
---------------	--

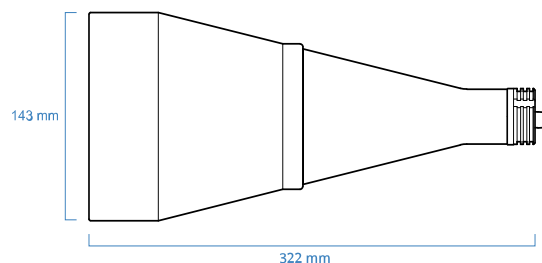

## NOTES

1. Nominal value, with no spacers in place.
2. Used in continuous (not pulsed) mode.
3. At max forward current. Tolerance is  $\pm 0.06V$  on forward voltage measurements.
4. At pulse width  $\leq 10$  ms, duty cycle  $\leq 10\%$  condition. Built-in electronics board must be bypassed (see tech info).

## COMPATIBLE PRODUCTS



CMHO 096  
Clamping mechanics for TCxx085, TCxx096 lenses and LTCL096-X illuminators



LTSCHP 1W-B  
Replacement LED module, blue



LED1W-B  
Replacement LED source for LTSCHP1W series, blue



CB244P1500  
Power cable for LTSCHP1W LED modules