


# MC12K 050X

Linescan macro lens, magnification 0.05 x, M72 x 0.75 mount

Focusing (1)		near	nominal	far	
Magnification	(x)	0.517	0.500	0.483	
Object field of view (mm x mm)					
with line-12k detector	12k x 5.2 μm	62.40	119.9	124.8	128.3
with line-12k detector	12k x 5 μm	61.44	118.8	122.9	127.1
with line-16k detector	16k x 3.5 μm	57.34	111.9	114.7	119.7
with 35 mm detector	36 x 24 (mm x mm)	69.6 x 46.4	72.0 x 48.0	74.5 x 49.6	
Optical specifications					
Working distance	(mm)	217.1	223.0	229.1	
f/# (2)			9		
Distortion typical (max) (3)	(%)		< 0.01	(0.02)	
Field depth (4)	(mm)		0.9		
CTF 50 lp/mm	(%)		> 50		
Image side numerical aperture			0.056		
Object side numerical aperture			0.028		
Mechanical specifications					
Length (5)	(mm)		153.3		
Diameter	(mm)		76		
Mass	(g)		990		
Mount (6)			M72 x 0.75	FD 6.56	

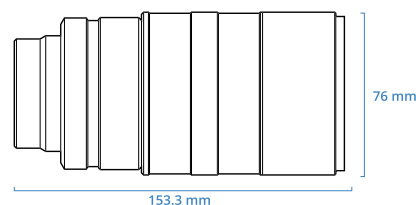

## NOTES

1. Maximum and minimum acceptable focusing change
2. Working F-number: the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request
3. Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
4. At the borders of the field depth the image can be still used for measurement but to get a very sharp image only half of the nominal field depth should be taken into account
5. Measured from the front end of the mechanics to the camera flange; take into account a +/- 2.5 mm tolerance due to the focusing mechanism
6. FD stands for Flange Distance (in mm), defined as the distance from the mounting flange (the "metal ring" in rear part of the lens) to the camera detector plane.

## COMPATIBLE PRODUCTS



CMHO MC12K 067  
Clamping mechanics for MC12K 050-067 lenses