
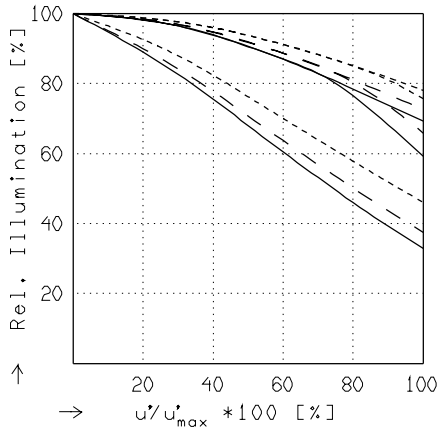


COMPONON-S 5.6/100


$f' = 102,3 \text{ mm}$ $\beta_p = 0,988$
 $s_F = -81,8 \text{ mm}$ $s_{EP} = 21,8 \text{ mm}$
 $s_{F'} = 84,9 \text{ mm}$ $s_{A'P} = -16,2 \text{ mm}$
 $HH' = -2,4 \text{ mm}$ $\Sigma d = 35,6 \text{ mm}$

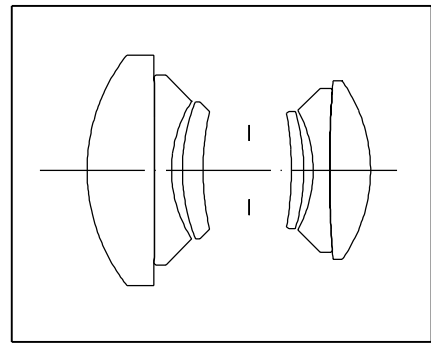

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


	$f / 5.6$	$f / 8.0$	$f / 11.0$
—	$\beta' = -0.0833$	$u'_{max} = 48.4$	$00' = 1439.$
- -	$\beta' = -0.1667$	$u'_{max} = 48.4$	$00' = 833.$
- - - -	$\beta' = -0.3333$	$u'_{max} = 48.4$	$00' = 543.$

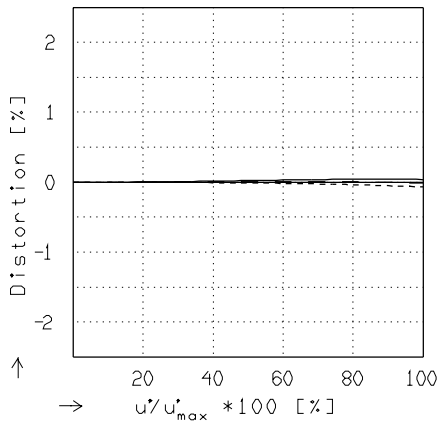

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—	$\beta' = -0.0833$	$u'_{max} = 48.4$	$00' = 1439.$
- -	$\beta' = -0.1667$	$u'_{max} = 48.4$	$00' = 833.$
- - - -	$\beta' = -0.3333$	$u'_{max} = 48.4$	$00' = 543.$

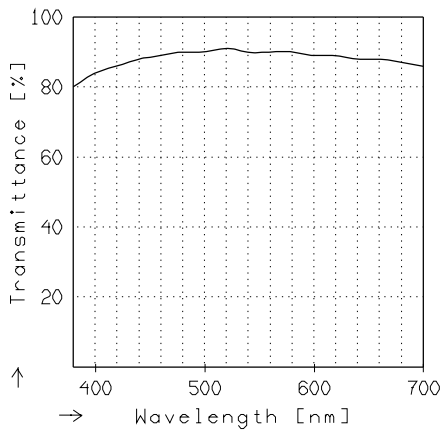

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.