


This C-Mount lens with 17.6 mm image circle and 380-1000 nm broadband AR coating is designed for pixel sizes down to 2.4 µm. The anti-shading design prevents shading caused by micro lenses and results in a very even light distribution. A robust metal housing ensures a stable image position even under harsh environmental conditions.

| Key features | Applications |
|--|---|
| <ul style="list-style-type: none"> • 1.1" C-Mount compact lens • For pixel size down to 2.4 µm • Suitable for all Sony's Pregius™ generations • For visible and near IR illumination | <ul style="list-style-type: none"> • Machine Vision • AOI (Automated Optical Inspection) • 3D and 2D measurement • Robotic Vision |
| Technical specifications | |
| Type [standard] | C |
| ID [standard] | 1110511 |
| Interface | C-Mount |
| Focal length [mm] | 12 |
| F/# range | F/2.8 ... F/22 |
| Numerical aperture [object image] | - 0.17 |
| Max. sensor size [mm] | 17.6 |
| Max. angle of view [°] | 75 |
| Rec. magnification range | -0.1 ... 0 |
| Rec. working distance range [mm] | 104 ... ∞ |
| Min. working distance without extension tubes [mm] | 6 |
| Filter thread [mm] | M40.5 x 0.5 |
| Storage temperature [°C] | -25... +70 |
| Net. weight [g] | 145 |
| Additional info | - |
| f'eff [mm] | 11.85 |
| SF [mm] | 11.38 |
| S'F' [mm] | 10.79 |
| HH' [mm] | 29.10 |
| β'P | 5.78 |
| SEP [mm] | 13.43 |
| S'AP [mm] | -57.73 |
| Σd [mm] | 53.38 |


MTF charts

| Spectrum name | VIS | | | | | |
|------------------|-----|-----|-----|-----|-----|-----|
| Wavelengths [nm] | 425 | 475 | 525 | 575 | 625 | 675 |
| Rel. weights [%] | 8 | 16 | 23 | 22 | 19 | 13 |

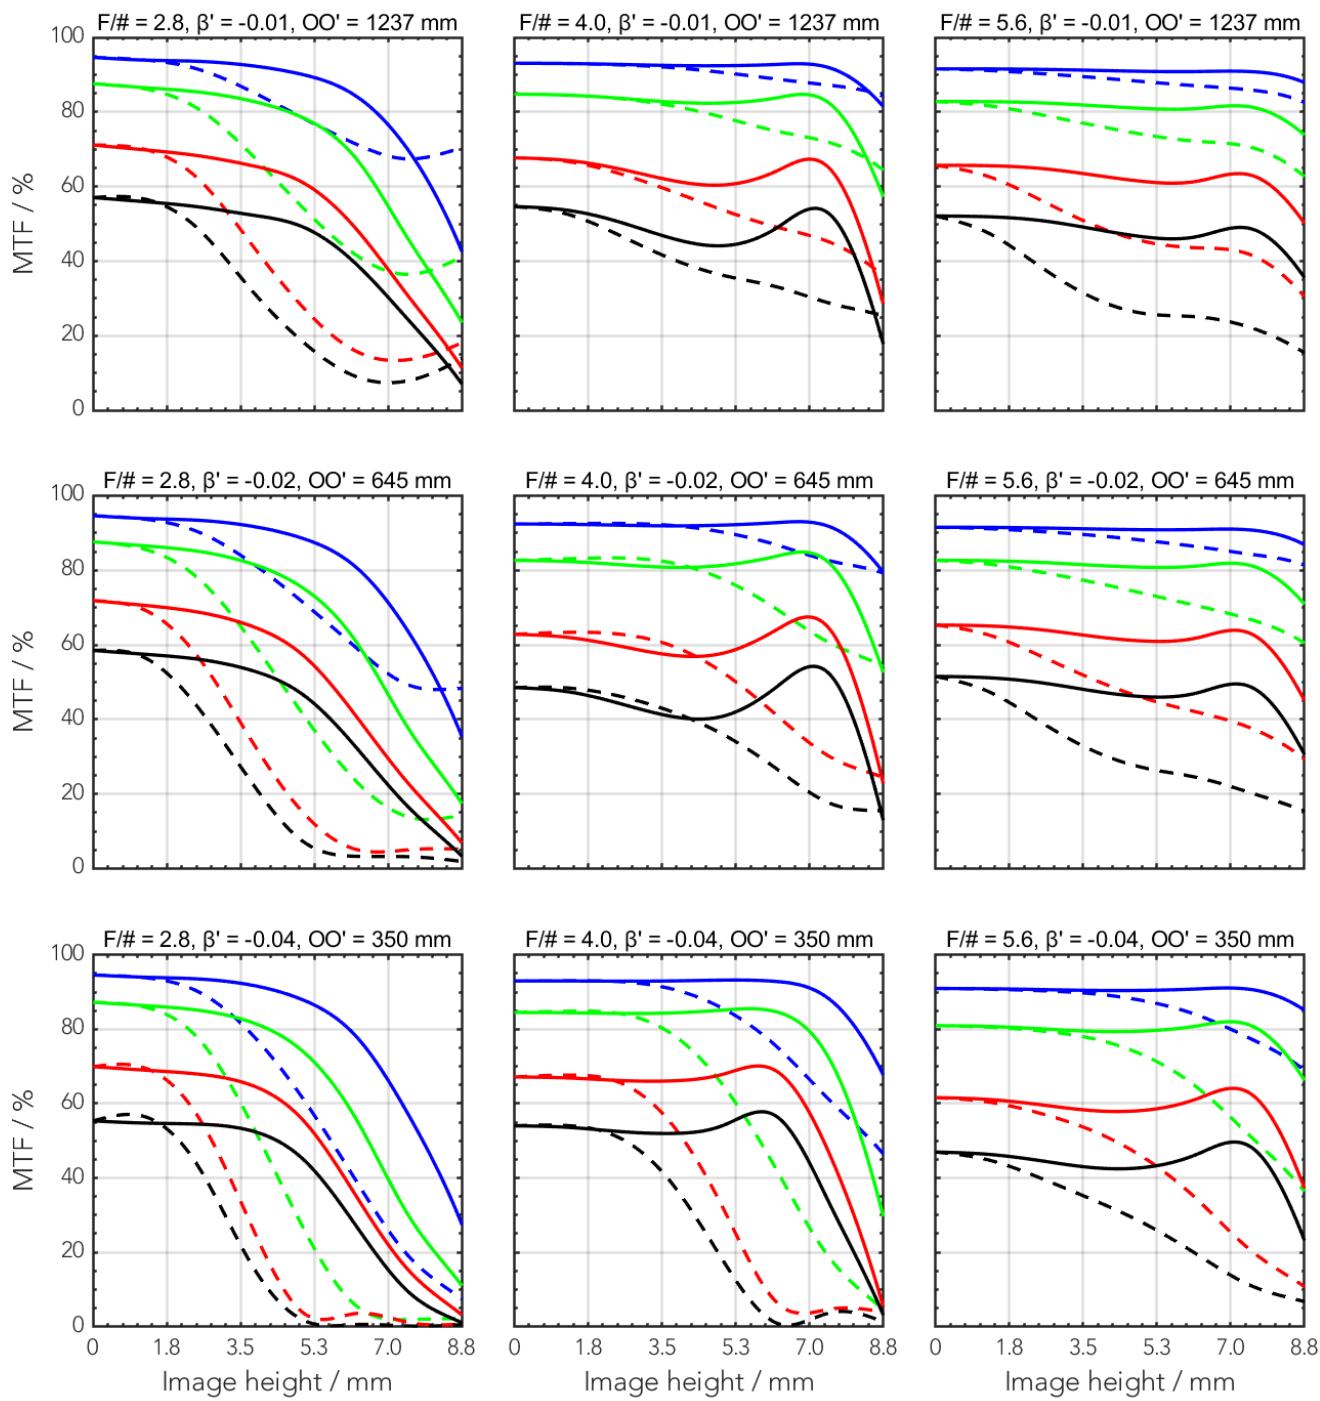


— 20 LP/mm, radial — 40 LP/mm, radial — 80 LP/mm, radial — 120 LP/mm, radial
- - - 20 LP/mm, tangential - - - 40 LP/mm, tangential - - - 80 LP/mm, tangential - - - 120 LP/mm, tangential


Rel. illumination vs. image height

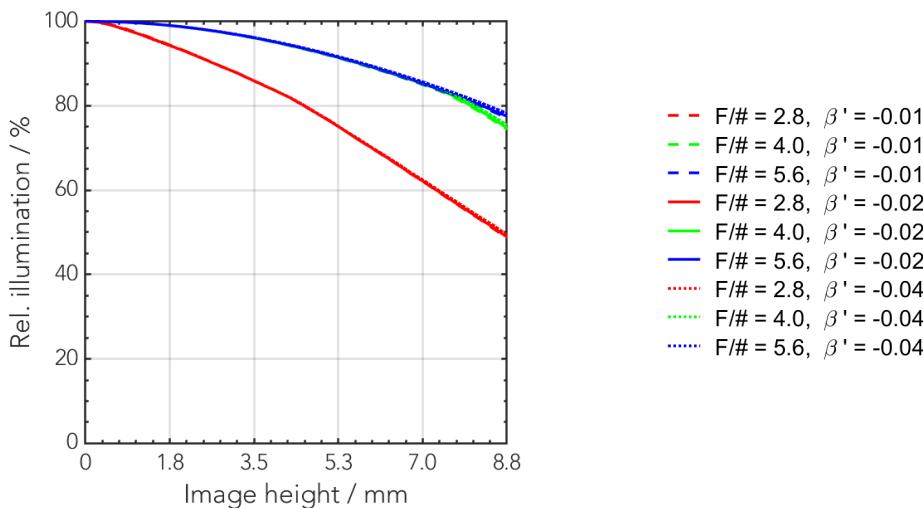


Distortion vs. image height

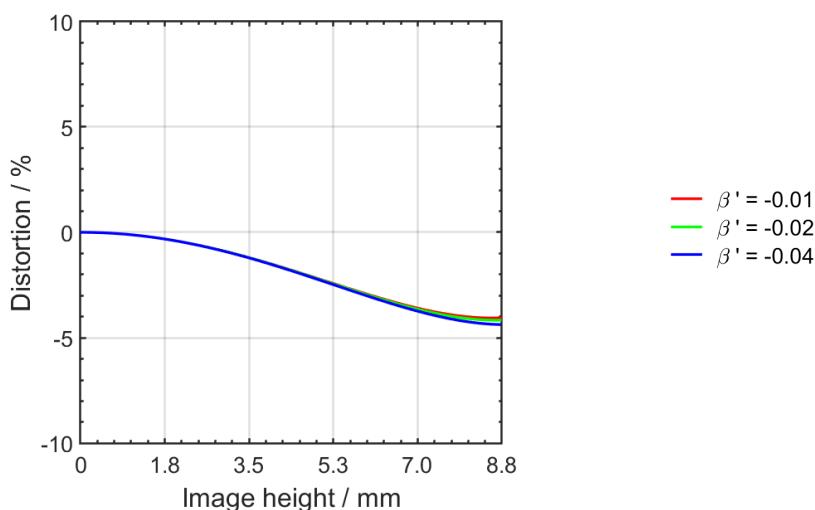

Transmittance vs. wavelength

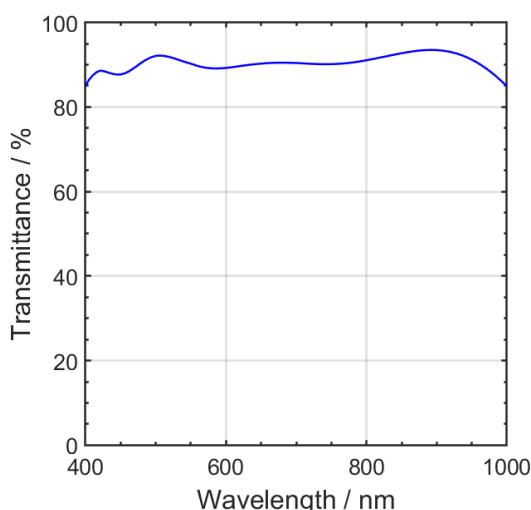

Technical drawings

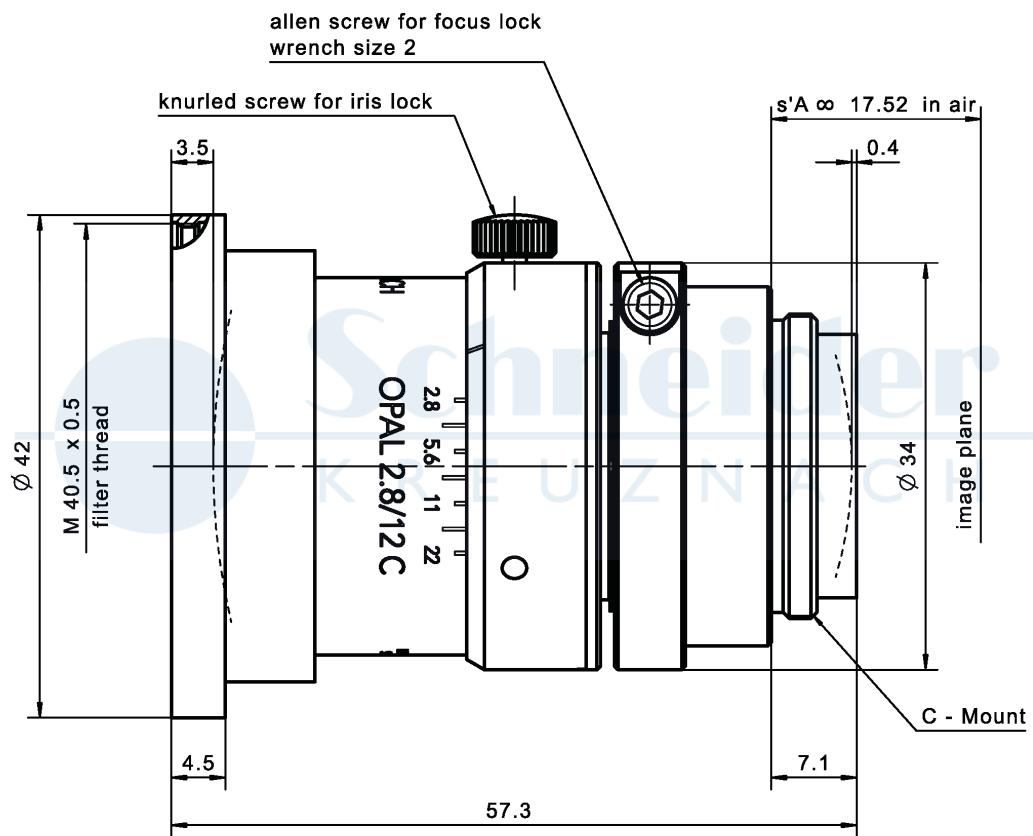

| Accessories | Mount | Eff. length | ID |
|----------------|-------------------|-------------|---------|
| Adapter | CS-Mount | 5 mm | 25081 |
| | C-Mount / M42x1 | 5.5 mm | 1075817 |
| Extension tube | C-Mount / C-Mount | 5 mm | 39316 |
| | C-Mount / C-Mount | 8 mm | 39315 |
| | C-Mount / C-Mount | 10 mm | 39312 |

Annotation

| | |
|------------------------------|---|
| Focal length | Nominal focal length |
| F/# range | Image space F-number range for infinity focus position |
| Numerical aperture | Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Max. sensor size | Image circle diameter |
| Max. angle of view | Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Rec. magnification range | Magnification range as recommended by Schneider-Kreuznach |
| Rec. working distance range | Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range |
| Max. mechanical focus travel | Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Net weight | weight of unpacked lens without lens cap |
| f'_{eff} | Effective focal length |
| SF | Distance between vertex of first lens surface and object space focal point |
| S'F' | Distance between vertex of last lens surface and image space focal point (back focal distance at infinity) |
| HH' | Distance between principal planes |
| $\beta'P$ | Pupil magnification (= exit pupil diameter / entrance pupil diameter) |
| SEP | Distance between vertex of first lens surface and entrance pupil |
| S'AP | Distance between vertex of last lens surface and exit pupil |
| Σd | Distance between vertices of first and last lens surface |
| $s'A$ | Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification) |
| β' | Magnification (= image size / object size), negative value because image is inverted |
| OO' | Distance between object and image |

Unless otherwise stated all dimensions in this data sheet are in mm.

Headquarters Europe

Jos. Schneider Optische Werke GmbH

Ringstraße 132

55543 Bad Kreuznach

Ø +49 671 601 205

✉ cs@schneiderkreuznach.com

www.schneiderkreuznach.com

Offices Worldwide

America

Ø +1 800 645 7239 (East Coast)

Ø +1 800 228 1254 (West Coast)

✉ info@schneideroptics.com

Asia

Ø +86 755 8832 1170

✉ info@schneider-asiapacific.com