

Genie C1024

Area Scan Color Cameras



Key Features

- Uses standard PC and server Ethernet ports & hardware
- Supports cable lengths up to 100 m (CAT-5e or CAT-6)
- Simplified set-up with field proven Sapera Essential software featuring CamExpert
- Engineered to accommodate industrial environment with a Ruggedize, screw mount, RJ-45 connector
- Small compact form factor

Programmability

- Achieve 20 fps in full resolution
- Higher frame rates achievable in partial scan mode
- Global electronic shutter with exposure control
- Programmable LUT
- On-board flat-field correction
- On-board Color conversion

Typical Applications

- Electronics manufacturing inspection
- Food inspection
- Intelligent traffic systems

Overview

Small compact GigE Vision camera with uncompromised image quality.

The Genie C1024 uses a Sony CCD, color bayer sensor with a resolution of 1024 x 768. Operating at 20 frames per second at full resolution, the Genie C1024 takes advantage of gigabit Ethernet technology, transmitting data over standard CAT-5e and CAT-6 cables to distances of up to 100 m. Like all Genie cameras, the C1024 is based on AIA (Automated Imaging Association) GigE Vision Standard to directly link the camera to a PC.




Specifications

| | |
|-----------------------|--|
| Active Resolution | 1024 x 768 |
| Frame Rate | 20 fps |
| Pixel Size | 4.65 μm |
| Data Format | 32-bits, YUV or Raw Bayer |
| Exposure Control | Programmable, or via External Trigger |
| Dynamic Range | 57 dB |
| Nominal Gain Range | -6 dB to +12 dB |
| Output | Gigabit Ethernet, also supports 100 Mbps |
| I/O Ports | 2 opto-isolated input, 2 opto-isolated output, C or CS-mount |
| Lens Mount | C or CS-mount |
| Size | 44 mm x 29 mm x 67 mm (including lens adapter) |
| Mass | ~115 g (without lens) |
| Operating Temp | 0°-45°C |
| Power Supply | 12 V |
| Power Dissipation | 4W |
| Data Connector | Standard or Screw mount RJ-45 |
| Power and I/O | Hirose 12-Pin |
| Software Platform | DALSA Sapera LT |
| GigE Vision Compliant | Yes |
| Regulatory Compliance | FCC Class A, CE , RoHs 2002/95/EC |
| Part Number | CR-GEN0-C102x |


Genie C1024

Area Scan Color Cameras

All Genie cameras feature value added functionality designed specifically for imaging and machine vision applications. All features are easily accessible with DALSA's advanced software tools. These tools deliver superior image capture, performance, and control.

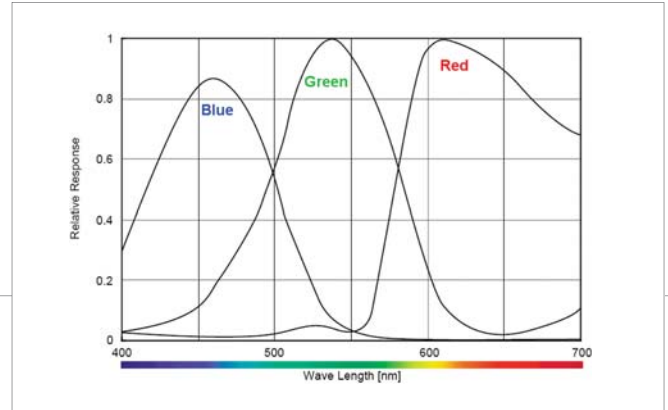

C or CS-mount: 1" diameter
32 threads per inch

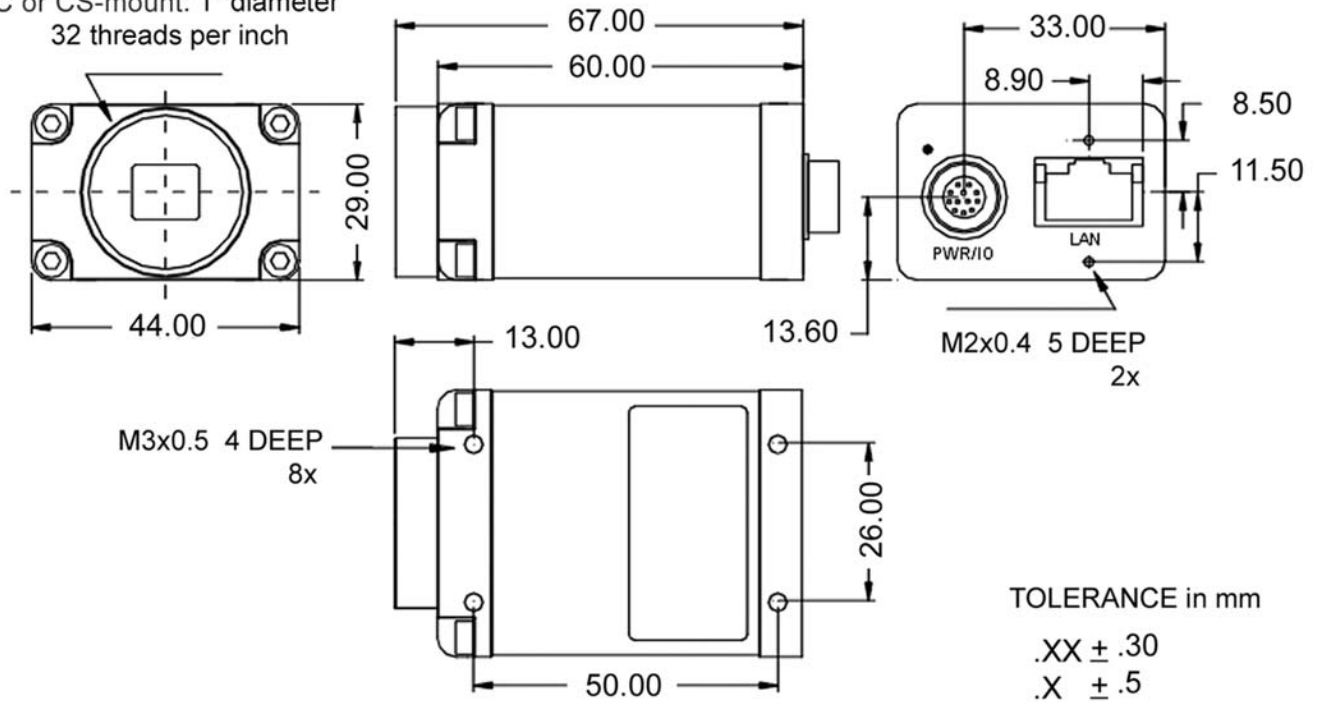

www.dalsa.com

Americas

Boston, USA
Tel: +1 978-670-2000
sales.americas@dalsa.com

Europe

Munich, Germany
Tel: +49 8142-46770
sales.europe@dalsa.com

Asia Pacific

Tokyo, Japan
+81 3-5960-6353
sales.asia@dalsa.com

DALSA is an international leader in digital imaging and semiconductors and has its corporate offices in Waterloo, Ontario, Canada.

All trademarks are registered by their respective companies. DALSA reserves the right to make changes at any time without notice. © DALSA 2008. CODS-1214 © DALSA 2007

