
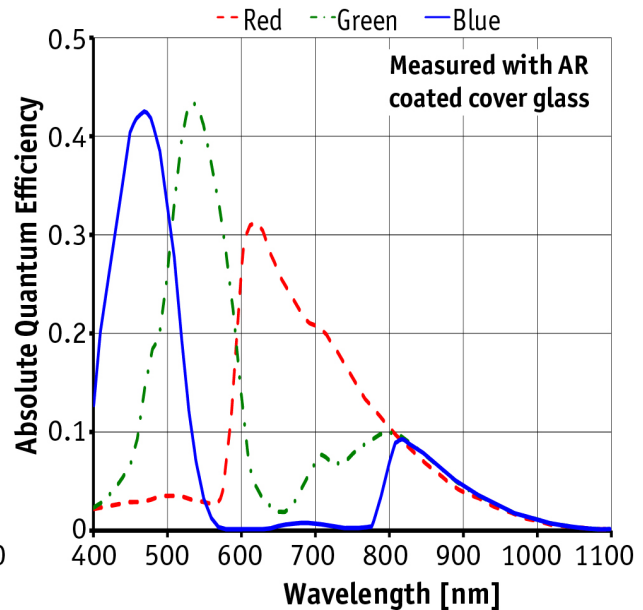


Specifications

Prosilica GT		4905
Interface	IEEE 802.3 1000baseT	
Resolution	4896 x 3264	
Sensor	Truesense KAI-16050	
Sensor type	CCD Progressive	
Sensor size	APS-H	
Cell size	5.5 µm	
Lens mount	F-Mount (M58 optional)	
Max frame rate at full resolution	7.5 fps	
A/D	14 bit	
On-board FIFO	128 MB	
Output		
Bit depth	14 (mono) - 12 (color) bit	
Mono modes	Mono8, Mono12, Mono12Packed, Mono14	
Color modes YUV	YUV411Packed, YUV422Packed	
Color modes RGB	RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed	
Raw modes	BayerGR8, BayerGR12, BayerGR12Packed	
General purpose inputs/outputs (GPIOs)		
TTL I/Os	1 input, 2 outputs	
Opto-coupled I/Os	1 input, 2 outputs	
RS-232	1	
Operating conditions/Dimensions		
Operating temperature	-20°C ... +50°C	
Power requirements (DC)	PoE, or 7-25 VDC	
Power consumption (12 V)	7.3 W @ 12 VDC	
Mass	372 g	
Body Dimensions (L x W x H in mm)	96 x 66 x 53.3 mm including connectors, w/o tripod and lens	
Regulations	CE, FCC Class A, RoHS (2011/65/EU)	

[Download the Prosilica GT4905 technical drawing](#)

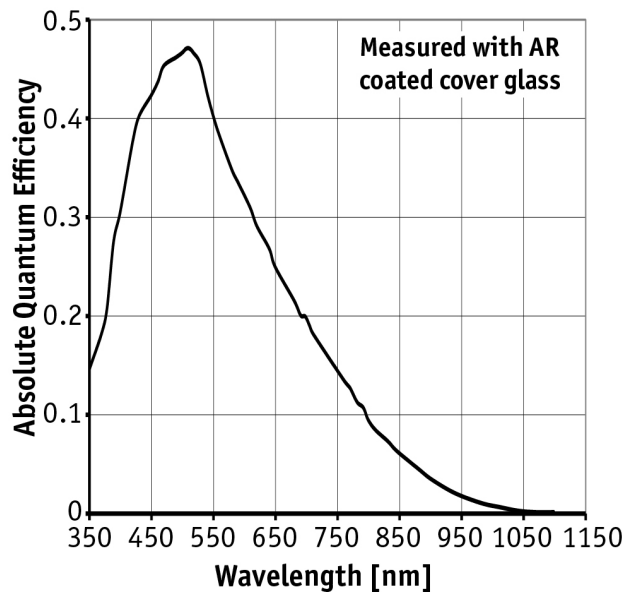

Smart features

The Prosilica GT4905 features include:

- Auto exposure
- Auto gain
- Auto white balance
- Flexible binning
- Region of Interest (ROI) readout
- DSP subregion (selectable ROI for auto features)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Multiple LUT
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and multiframe acquisition modes

Applications

The Prosilica GT4905 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications