



# Alvium 1500 C-120



- AR0135CS CMOS sensor
- ALVIUM image processing
- MIPI CSI-2 interface
- Various hardware options

## Model without hardware options

Alvium 1500 C – Powerful camera modules for embedded vision

## Revolutionary MIPI CSI-2 camera module

Alvium 1500 C-120 with ON Semi AR0135CS runs 52.0 frames per second at 1.2 MP resolution.

Alvium 1500 C is a revolutionary MIPI CSI-2 camera optimized for embedded vision applications. The Alvium 1500 C offers the performance and versatility of industrial cameras for the embedded world. Equipped with industrial-grade CMOS sensors from ON Semiconductor, Alvium 1500 C cameras deliver excellent image quality and high frame rates.

The standardized CSI-2 driver ensures quick integration with the flexibility to change camera models easily.

To operate Alvium CSI-2 cameras on your vision system, Allied Vision provides different access modes: - **Direct Register Access (DRA)** to control the cameras via registers for advanced users. - Video4Linux2 Access allows to control the cameras via established V4L2 API and applications like GStreamer and OpenCV. Open-source CSI-2 drivers are available on [GitHub](#) for different boards and system on chips (SoCs).

See the Alvium Cameras Hardware Options for lens mount and housing options, as well as the [Customization and OEM Solutions webpage](#) for additional options.

## Specifications

### Alvium 1500 C-120


Interface

MIPI CSI-2, up to 4 lanes

<b>Alvium 1500 C-120</b>	
Resolution	1280 (H) × 960 (V)
Spectral range	300 to 1100 nm
Sensor	ON Semi AR0135CS
Sensor type	CMOS
Shutter mode	Global shutter
Sensor size	Type 1/3
Pixel size	3.75 μm × 3.75 μm
Lens mounts (available)	C-Mount
Max. frame rate at full resolution	52 fps using 1 to 4 lanes, RAW8 (GREY)
ADC	12 Bit
Image buffer (RAM)	256 KByte
Non-volatile memory (Flash)	1024 KByte
<b>Imaging performance</b>	
Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for monochrome models measured without optical filter.	
Quantum efficiency at 529 nm	69 %
Temporal dark noise	6.1 e <sup>-</sup>
Saturation capacity	9430 e <sup>-</sup>
Dynamic range	63 dB
Absolute sensitivity threshold	6.7 dB
<b>Output</b>	
Bit depth	Max. 12 Bit
YUV color pixel formats	YUV422 8-bit (UYVY) [MIPI CSI-2 (FOURCC)]
RGB color pixel formats	RBG888 (RGB3) [MIPI CSI-2 (FOURCC)]
Raw pixel formats	RAW8 (GREY), RAW10 (Y10), RAW12 (Y12) [MIPI CSI-2 (FOURCC)]
<b>General purpose inputs/outputs (GPIOs)</b>	
TTL I/Os	2 programmable GPIOs
<b>Operating conditions/dimensions</b>	
Operating temperature	-20 °C to +65 °C (housing)

<b>Alvium 1500 C-120</b>	
Power requirements (DC)	5 VDC over MIPI CSI-2
Power consumption	Typical: 1.1 W
Mass	40 g
Body dimensions (L × W × H in mm)	26 × 29 × 29
Regulations	2011/65/EU, including amendment 2015/863/EU (RoHS)

## Quantum efficiency

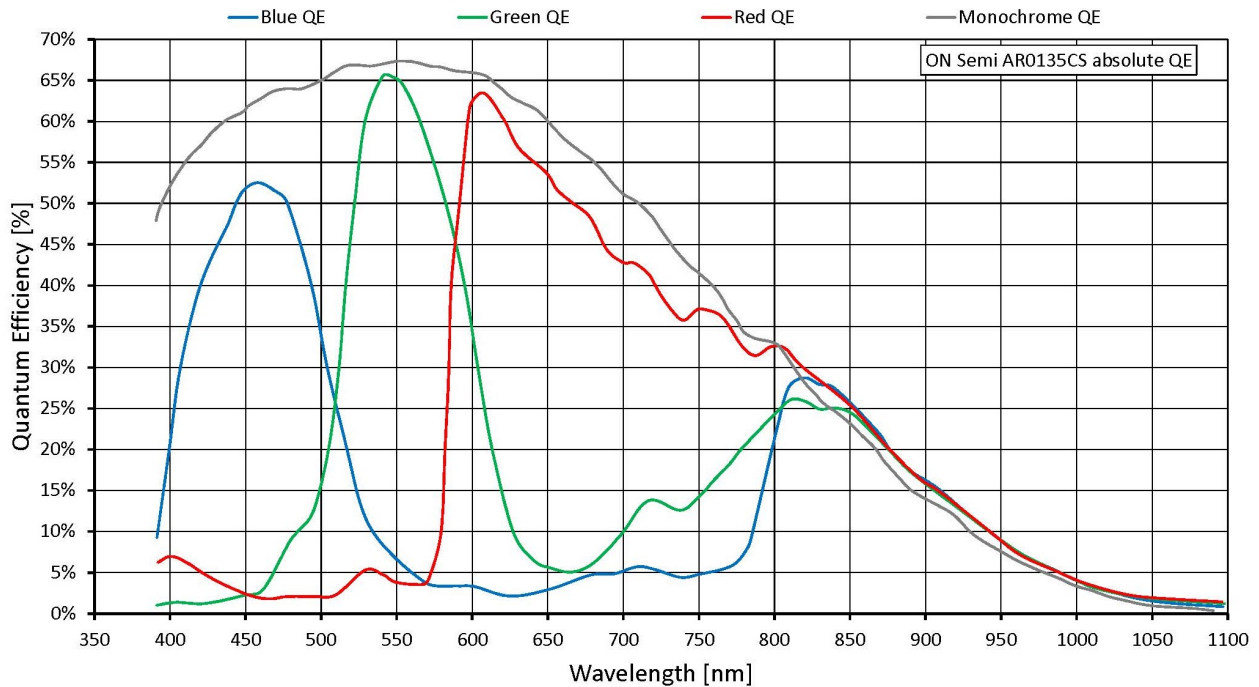

## Features

Image control: Auto

- Auto exposure
- Auto gain
- Auto white balance (color models)

## Image control: Other

- Black level
- Color transformation (incl. hue, saturation; color models)
- De-Bayering up to 5×5 (color models)
- DPC (defect pixel correction)
- FPNC (fixed pattern noise correction)
- Gamma
- Reverse X/Y
- ROI (region of interest)

## Camera control

- Acquisition frame rate
- Firmware update in the field
- I/O and trigger control
- Temperature monitoring

## Technical drawing

