




In series


The model is in series and available for the long term.



Specification

Sensor

| | |
|---|----------------------|
| Sensor type | CMOS Mono |
| Shutter | Global Shutter |
| Sensor characteristic | Linear |
| Readout mode | Progressive scan |
| Pixel Class | 3 MP |
| Resolution | 3.19 Mpix |
| Resolution (h x v) | 2064 x 1544 Pixel |
| Aspect ratio | 4:3 |
| ADC | 12 bit |
| Color depth (camera) | 12 bit |
| Optical sensor class | 1/1.8" |
| Optical Size | 7.121 mm x 5.327 mm) |
| Optical sensor diagonal | 8.89 mm (1/1.8") |
| Pixel size | 3.45 μ m |
| Manufacturer | Sony |
| Sensor Model | IMX265LLR-C |
| Gain (master/RGB) | 24x/4x |
| AOI horizontal | same frame rate |
| AOI vertical | increased frame rate |
| AOI image width / step width | 264 / 8 |
| AOI image height / step width | 1 / 1 |
| AOI position grid (horizontal/vertical) | 8 / 1 |
| Binning horizontal | same frame rate |
| Binning vertical | increased frame rate |
| Binning method | M/C automatic |
| Binning factor | 2 / 4 / 8 |
| Subsampling horizontal | same frame rate |
| Subsampling vertical | same frame rate |
| Subsampling method | M/C automatic |
| Subsampling factor | 2, 4, 8 |

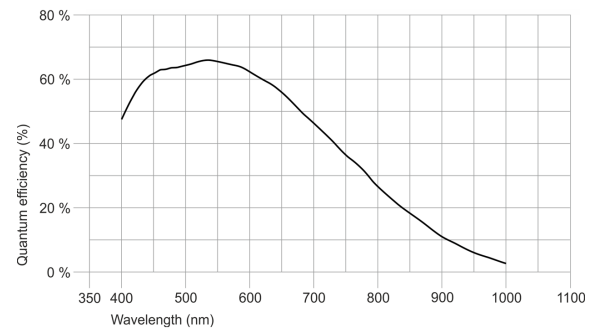

Model

| | |
|-----------------------------------|--------------------|
| Frame rate freerun mode | 37 fps |
| Frame rate trigger (continuous) | 37 fps |
| Frame rate trigger (maximum) | 40 fps |
| Exposure time (minimum - maximum) | 0.030 ms - 2000 ms |
| Long exposure (maximum) | 90000 ms |
| Power consumption | 1.7 W - 3.1 W |
| Image memory | 128 MB |

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.
For PCB versions, refer to the separate hints in the respective documentation.


| | |
|-------------------------------------|---------------------------------|
| Device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F |
| Device temperature during storage | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 20 % - 80 % |

Connectors

| | |
|---------------------|---|
| Interface connector | GigE RJ45 |
| I/O connector | 8-pin Hirose connector (HR25-7TR-8PA(73)) |
| Power supply | 12 V - 24 V or PoE |

Pin assignment I/O connector

| | |
|---|---|
| 1 | Ground (GND) |
| 2 | Flash output with optocoupler (-) - Line 1 |
| 3 | General Purpose I/O (GPIO) 1 - Line 2 |
| 4 | Trigger input with optocoupler (-) - Line 0 |
| 5 | Flash output with optocoupler (+) - Line 1 |
| 6 | General Purpose I/O (GPIO) 2 |
| 7 | Trigger input with optocoupler (+) - Line 0 |
| 8 | Input power supply (VCC) 12-24 V DC |



Design

| | |
|------------------|-----------------------------|
| Lens Mount | - |
| IP code | - |
| Dimensions H/W/L | 31.5 mm x 40.0 mm x 30.0 mm |
| Mass | 36 g |

Features

| | | |
|-------------------|-----------------------------|---|
| Image Acquisition | Freerun | ✓ |
| | Software trigger | ✓ |
| | Hardware trigger | ✓ |
| | Trigger controlled exposure | ✓ |
| | Denoisier | ✓ |
| | Long exposure | ✓ |
| | Line scan | ✓ |
| | Line scan highspeed | - |
| Flashing | Flashing | ✓ |
| | PWM flashing | ✓ |

Image Adjustments

| | |
|-------------------|---|
| Auto exposure | ✓ |
| Auto gain | ✓ |
| Auto whitebalance | - |
| Color correction | - |
| Gamma | ✓ |
| LUT | ✓ |
| Mirror/flip | - |

On-board Image Processing

| | |
|---------------------|---|
| Pixel formats | Mono8 Mono10 Mono10p Mono12 Mono12p |
| Region of interest | ✓ |
| Decimation (FPGA) | ✓ |
| Decimation (Sensor) | - |
| Binning (FPGA) | ✓ |
| Binning (Sensor) | 1x2 Increases frame rate. |

Others

| | |
|--------------------------------|-----|
| IP settings | ✓ |
| Bandwidth management | ✓ |
| Chunks | ✓ |
| Sequencer | ✓ |
| PTP | ✓ |
| Firmware update | ✓ |
| 1st supported firmware version | 1.0 |