
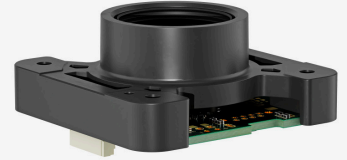


**In series**


The model is in series and available for the long term.

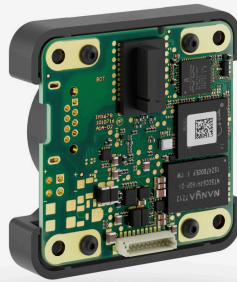

## Specification

### Sensor

Sensor type	CMOS Mono
Shutter	Global Shutter
Sensor characteristic	Linear
Readout mode	-
Pixel Class	5 MP
Resolution	5.01 Mpix
Resolution (h x v)	2448 x 2048 Pixel
Aspect ratio	5:4
ADC	12 bit
Color depth (camera)	0 bit
Optical sensor class	1/1.8"
Optical Size	6.707 mm x 5.612 mm
Optical sensor diagonal	8.75 mm (1/1.83")
Pixel size	2.74 $\mu$ m
Manufacturer	Sony
Sensor Model	IMX568-AAMJ-C
Gain (master/RGB)	-/-
AOI horizontal	
AOI vertical	
AOI image width / step width	- / -
AOI image height / step width	- / -
AOI position grid (horizontal/vertical)	- / -
Binning horizontal	
Binning vertical	
Binning method	
Binning factor	-
Subsampling horizontal	
Subsampling vertical	
Subsampling method	
Subsampling factor	-

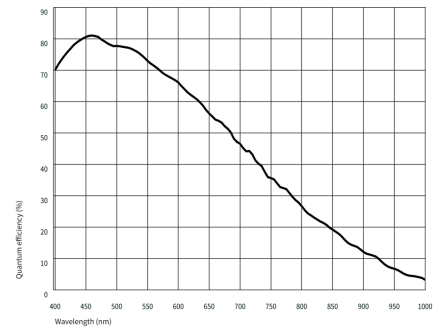

## Model

Frame rate freerun mode	-
Frame rate trigger (maximum)	-
Exposure time (minimum - maximum)	-
Power consumption	2.8 W - 4.2 W

## Ambient conditions

For PCB versions, refer to the separate hints in the respective documentation.


Allowed device temperature during operation	0 °C - 85 °C / 32 °F - 185 °F
Allowed ambient temperature during operation	0 °C - 30 °C / 32 °F - 86 °F
Allowed ambient temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	20 % - 80 %

## Connectors

Interface connector	ZIF
I/O connector	10-pin Wuerth connector (WR-WTB 1.00 mm)
Power supply	12 V - 24 V

## Pin assignment I/O connector

1	Power supply (VCC) 12-24 V
2	Power supply, ground
3	General Purpose I/O (GPIO) 2, 3.3 V - Line 3
4	General Purpose I/O (GPIO) 1, 3.3 V - Line 2
5	I2C SCL (signal clock) 3.3 V
6	I2C SDA (signal data) 3.3 V
7	Trigger input without optocoupler 3.3 V - Line 0
8	Flash output without optocoupler 3.3 V - Line 1
9	Ground (GND)
10	Voltage output 3.3 V, max. 100 mA



## Design

Lens Mount	C-Mount
IP code	IP30
Dimensions H/W/L	50.0 mm x 50.0 mm x 26.5 mm
Mass	32 g
Housing material	-

## Features

List of on-camera image pre-processing features.

All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

Image Acquisition	Freerun	-
	Software trigger	-
	Hardware trigger	-
	Trigger controlled exposure	-
	Denoisier	-
	Long exposure	-
Flashing	Line scan	-
	Flashing	-
	PWM flashing	-

Subject to technical modifications (2025-05-09)

Image Adjustments

Auto exposure	-
Auto gain	-
Auto whitebalance	-
Color correction	-
Gamma	-
LUT	-
Mirror/flip	-

On-board Image Processing

Pixel formats	
Region of interest	✓
Decimation (FPGA)	-
Decimation (Sensor)	-
Binning (FPGA)	-

Others

IP settings	-
Bandwidth management	-
Chunks	-
Sequencer	-
PTP	-
Firmware update	-
1st supported firmware version	