


# TC 23 080

Bi-telecentric lens for 2/3" detectors, magnification 0.110 x, C-mount

Magnification	(x)	0.110
Image circle	(mm)	11.0
<b>Object field of view</b>		
with 1/3" detector (4.8 x 3.6 mm)	(mm x mm)	43.5 x 32.6
with 1/2.5" detector (5.70 x 4.28 mm)	(mm x mm)	51.7 x 38.8
with 1/2" detector (6.4 x 4.8 mm)	(mm x mm)	58.0 x 43.5
with 1/1.8" detector (7.13 x 5.37 mm) (7)	(mm x mm)	64.6 x 48.7
with 2/3" - 5 Mpx detector (8.45 x 7.07 mm)	(mm x mm)	76.5 x 64.0
<b>Optical specifications</b>		
Working distance (1)	(mm)	227.7
f/# (2)		8
Telecentricity typical (max) (3)	(deg)	< 0.04 (0.08)
Distortion typical (max) (4)	(%)	< 0.02 (0.10)
Field depth (5)	(mm)	55
CTF @ 70 lp/mm	(%)	> 50
<b>Dimensions</b>		
Mount		C
Length (6)	(mm)	291.2
Diameter	(mm)	116
Mass	(g)	1600

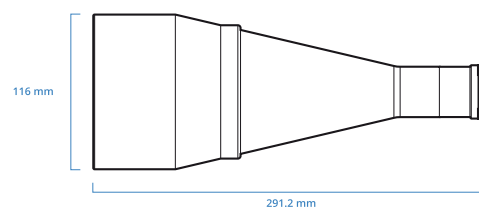

## NOTES

- Working Distance: distance between the front lens and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
- Working F-number: the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request.
- Maximum slope of chief rays inside the lens: when converted to millirad, it gives the maximum measurement error for any millimeter of object displacement. Typical (average production) values and maximum (guaranteed) values are listed.
- Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
- At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 5.5 μm.
- Measured from the front end of the mechanics to the camera flange.
- With 1/1.8" (9 mm diagonal) detectors, the FOV of TC12 yyy lenses may show some vignetting at the image corners, as these lenses are optimized for 1/2" detectors (8 mm diagonal).
- For the fields with the indication "Ø =", the image of a circular object of such diameter is fully inscribed into the detector.

## COMPATIBLE PRODUCTS



LTCLHP080-G  
Telecentric HP illuminator, beam diameter 100 mm, green



CMHO 080  
Clamping mechanics for TCxx072, TCxx080, LTCL080-X illuminators and PCxx030XS



LTRN 080 NW  
Ring LED illuminator, white